

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** EN 55032: 2015+A11:2020, Class A  
EN 61000-3-2: 2014 (Not Applicable)  
EN IEC 61000-3-2: 2019+A1:2021+A2:2024 (Not Applicable)  
EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022 (Not Applicable)  
EN 55035: 2017+A11:2020

**Report No.:** CEBDBO-WTW-P25070009

**Product:** QEC

**Brand:** ICOP

**Model No.:** M

**Series Model:** 02X-DXX ("X" can be A-Z, 0-9 or nil to indicate I/O port differentiation.)

**Received Date:** 2025/7/1

**Test Date:** 2025/7/2 ~ 2025/7/23

**Issued Date:** 2025/8/5

**Applicant:** ICOP Technology Inc.

**Address:** NO.15,Wugong 5th Rd., Xinzhuang Dist.,New Taipei City 24890,Taiwan ( R.O.C )

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Approved by:**

  
Jim Hsiang / Associate Technical Manager

**Date:**

2025/8/5

This test report consists of 73 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vivian Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate.....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Performance Criteria .....	7
2.2 Measurement Uncertainty .....	9
2.3 Supplementary Information .....	9
<b>3 General Information .....</b>	<b>10</b>
3.1 Description of EUT .....	10
3.2 Primary Clock Frequencies of Internal Source.....	10
3.3 Features of EUT .....	10
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode .....	11
3.5 Test Program Used and Operation Descriptions .....	12
3.6 Connection Diagram of EUT and Peripheral Devices .....	13
3.7 Configuration of Peripheral Devices and Cable Connections .....	16
<b>4 Test Instruments .....</b>	<b>18</b>
4.1 Conducted Emissions from Power Ports.....	18
4.2 Conducted Emissions from Wired Network Ports .....	19
4.3 Radiated Emissions up to 1 GHz .....	20
4.4 Radiated Emissions above 1 GHz.....	21
4.5 Electrostatic Discharges (ESD) .....	21
4.6 Radio Frequency Electromagnetic Field (RS).....	22
4.7 Fast Transients Common Mode (EFT).....	23
4.8 Surges .....	23
4.9 Radio Frequency Common Mode (CS).....	23
4.10 Power Frequency Magnetic Field (PFMF).....	24
<b>5 Limits of Test Items.....</b>	<b>25</b>
5.1 Conducted Emissions from Power Ports.....	25
5.2 Conducted Emissions from Wired Network Ports .....	25
5.3 Radiated Emissions up to 1 GHz .....	25
5.4 Radiated Emissions above 1 GHz.....	26
5.5 General immunity requirements .....	27
<b>6 Test Arrangements.....</b>	<b>29</b>
6.1 Conducted Emissions from Power Ports.....	29
6.2 Conducted Emissions from Wired Network Ports .....	30
6.3 Radiated Emissions up to 1 GHz .....	33
6.4 Radiated Emissions above 1 GHz.....	34
6.5 Electrostatic Discharges (ESD) .....	35
6.6 Radio Frequency Electromagnetic Field (RS).....	37
6.7 Fast Transients Common Mode (EFT).....	38
6.8 Surges .....	39
6.9 Radio Frequency Common Mode (CS).....	41
6.10 Power Frequency Magnetic Field (PFMF).....	43
<b>7 Test Results of Test Item.....</b>	<b>44</b>
7.1 Conducted Emissions from Power Ports.....	44
7.2 Conducted Emissions from Wired Network Ports .....	46
7.3 Radiated Emissions up to 1 GHz .....	49
7.4 Radiated Emissions above 1 GHz.....	51
7.5 Electrostatic Discharges (ESD) .....	53
7.6 Radio Frequency Electromagnetic Field (RS).....	57
7.7 Fast Transients Common Mode (EFT).....	57
7.8 Surges .....	57
7.9 Radio Frequency Common Mode (CS).....	58
7.10 Power Frequency Magnetic Field (PFMF).....	58

<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>59</b>
8.1	Conducted Emissions from Power Ports.....	59
8.2	Conducted Emissions from Wired Network Ports .....	60
8.3	Radiated Emissions up to 1 GHz .....	63
8.4	Radiated Emissions above 1 GHz.....	64
8.5	Electrostatic Discharges (ESD) .....	65
8.6	Radio Frequency Electromagnetic Field (RS).....	66
8.7	Fast Transients Common Mode (EFT) .....	67
8.8	Surges .....	69
8.9	Radio Frequency Common Mode (CS).....	70
8.10	Power Frequency Magnetic Field (PFMF).....	72
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>73</b>

## Release Control Record

Issue No.	Description	Date Issued
CEBDBO-WTW-P25070009	Original release.	2025/8/5

## 1 Certificate

**Product:** QEC

**Brand:** iCOP

**Test Model:** M

**Series Model:** 02X-DXX ("X" can be A-Z, 0-9 or nil to indicate I/O port differentiation.)

**Sample Status:** Engineering sample

**Applicant:** ICOP Technology Inc.

**Test Date:** 2025/7/2 ~ 2025/7/23

**Standard:** EN 55032: 2015+A11:2020, Class A

EN 61000-3-2: 2014 (Not Applicable)

EN IEC 61000-3-2: 2019+A1:2021+A2:2024 (Not Applicable)

EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022 (Not Applicable)

EN 55035: 2017+A11:2020

**Measurement procedure:** EN 61000-4-2: 2009 / IEC 61000-4-2: 2008 ED. 2.0

EN IEC 61000-4-3: 2020 / IEC 61000-4-3: 2020 ED. 4.0

EN 61000-4-4: 2012 / IEC 61000-4-4: 2012 ED. 3.0

EN 61000-4-5: 2014+A1:2017 / IEC 61000-4-5: 2017 ED. 3.1

EN IEC 61000-4-6: 2023 / IEC 61000-4-6: 2023 ED. 5.0

EN 61000-4-8: 2010 / IEC 61000-4-8: 2009 ED. 2.0

EN IEC 61000-4-11: 2020+AC:2020 / IEC 61000-4-11: 2020 ED. 3.0 (Not Applicable)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

## 2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions are as follows:

Standard	Test Item	Result	Remark
EN 55032	Conducted Emissions from Power Ports	Pass	Minimum passing Class A margin is -6.77 dB at 0.36902 MHz
EN 55032	Conducted Emissions from Wired Network Ports	Pass	Minimum passing Class A margin is -9.34 dB at 1.02342 MHz
EN 55032	Radiated Emissions up to 1 GHz	Pass	Minimum passing Class A margin is -0.40 dB at 175.00 MHz
EN 55032	Radiated Emissions above 1 GHz	Pass	Minimum passing Class A margin is -19.33 dB at 1766.53 MHz
IEC 61000-4-2	Electrostatic Discharges (ESD)	Pass	For EN 55035 Performance Criteria B
IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-4	Fast Transients Common Mode (EFT)	Pass	For EN 55035 Performance Criteria B
IEC 61000-4-5	Surges	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-6	Radio Frequency Common Mode (CS)	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-8	Power Frequency Magnetic Field (PFMF)	Pass	For EN 55035 Performance Criteria A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.1 Performance Criteria

### For EN 55035

#### General Performance Criteria

These criteria shall be used during the testing of primary functions where no specified in the normative annexes of EN 55035 is applicable.

#### Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

### Product Specific Performance criteria for Audio output functions

#### Performance criterion A

**Table – Performance criterion A – Limits for devices supporting telephony**

Type of immunity test	Frequency range MHz	Acoustic or electrical interference ratio	Equivalent direct measurement		
			dB(SPL)	Digital dBm0	Analogue dBm
Conducted	0.15 to 30	–20 dB	55	–50	–50
	30 to 80	–10 dB	65	–40	–40
Radiated	80 to 1 000	0 dB	75	–30	–30

The acoustic level of the demodulated audio shall be less than the limits in column 4.

For all other Audio output devices:

The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

#### Performance criterion B

Use the general performance criterion B.

#### Performance criterion C

Use the general performance criterion C.

### Product Specific Performance criteria for network functions

Equipment that provides these functions transmits and receives data through ports such as an analogue/digital data port. The networking functions are just like network switching and routing ; data transmission ; supervisory...etc.

The particular performance criteria which are specified in the normative annexes of CISPR 35/ EN 55035 take precedence over the corresponding parts of the general performance criteria.

### Performance criterion A

Where relevant, during the application of the test the network function shall, as a minimum, operate ensuring that:

- established connections shall be maintained throughout the application of the test;
- no change of operational state or corruption of stored data occurs;
- no increase in error rate above the figure defined by the manufacturer occurs. The manufacturer should select the most appropriate performance measurement criteria for the product or system, for example bit error rate, block error rate;
- no request for retry above the figure defined by the manufacturer;
- the data transmission rate does not reduce below the figure defined by the manufacturer;
- no protocol failure occurs;
- other verifications are described in F.3.3.1 of CISPR 35/ EN 55035.

### Performance criterion B

Established connections shall be maintained throughout the test, or shall self-recover in a way and timescale that is imperceptible to the user.

The error rate, request for retry and data transmission rates may be degraded during the application of the test. Degradation of the performance as described in criterion A is permitted, provided that the normal operation of the EUT is self-recoverable to the condition established prior to the application of the test.

Where required, as defined in Clause 5 of CISPR 35/ EN 55035, the acceptable operation of the function shall be verified at the completion of the test as described in Table H.1 of CISPR 35/ EN 55035, by confirming the following:

- the EUT's ability to establish a connection,
- the EUT's ability to clear a connection.

During surge testing disconnection is allowed on the analogue/digital data port being tested.

If the EUT is a supervisory equipment, it shall not impact the normal operation of the network being monitored. In addition, any supervisory functions impacted during the period of the test shall return to the state prior to the test. Elements to consider include: alarms, signalling lamps, printer output, network traffic rates, network monitoring.

### Performance criterion C

Degradation of performance as described in criteria A and B is permitted provided that the normal operation of the EUT is self-recoverable to the condition immediately before the application of the test, or can be restored after the test by the operator.

### Product Specific Performance Criteria for xDSL

The particular performance criteria which are specified in the normative annexes of CISPR 35/ EN 55035 take precedence over the corresponding parts of the general performance criteria.

### Performance criterion A

#### Applicable for the test requirement defined in table clause 2.1 of EN 55035

During the swept frequency test the established connection shall be maintained throughout the testing and the information transferred without any additional reproducible errors or loss of synchronisation. If a degradation in performance is observed and the system is adaptive, for example has the capability to automatically retrain in the presence of an interfering signal, then for conducted immunity tests only, the following procedure shall be followed:

- a) For each range of interfering frequencies in which degradation in performance is observed, three frequencies (beginning, middle and end) shall be identified.
- b) At each of the frequencies identified in step a), the interfering signal shall be turned on and the system is allowed to retrain.
- c) If the system is able to retrain and then functions correctly for a dwell time of at least 60 seconds without any additional reproducible errors or loss of synchronisation, then the performance level of the system is considered acceptable.
- d) The frequencies identified in step a) and the data rates achieved in step b) shall be recorded in the test report.

#### Applicable for the test requirement defined in table clause 2.2 of EN 55035

It is important that the modems are able to train in the presence of repetitive impulsive noise and minimize disruption to the end-user where a repetitive impulsive noise source starts after the link has synchronized. Therefore the following procedure and performance criteria shall apply.

The manufacturer shall select the class of impulsive noise protection (INP) to be used for the immunity test and should state this information in the technical documentation and in the test report. The maximum delay shall be set to 8 ms.

**In the absence of impulsive noise:** The modem shall operate without retraining at its target noise margin with a bit rate value depending on the line attenuation and the stationary noise being present on the line. (The actual value will be between the minimum and maximum bit rate values programmed in the port).

The impulsive noise source shall then be applied at the required test level.



**With the impulsive noise applied:** The modem shall operate without retraining and without SES at the bit rate established prior to the application of the impulsive noise. No extra CRC errors shall occur due to the impulsive noise. After the test, the noise margin value shall return to the target noise margin.

#### Performance criterion B

##### Applicable for the test requirement defined in table clause 2.3 of EN 55035

Modems shall withstand the occurrence of isolated impulsive noise events. The performance criteria defined in below Table shall be applied.

Impulse duration (ms)	Performance criteria
0.24	The application of the impulse shall not cause the xDSL link to lose synchronisation. No CRC errors are permitted.
10	The application of the 5 impulses shall result in less than 75 CRC errors and shall not cause the link to lose synchronisation.
300	The application of the impulse shall not cause the xDSL link to lose synchronisation.

##### Applicable for the test requirements defined in table clauses 2.5 and 4.5 of EN 55035

For application of this test to the xDSL port, a repetition rate of 100 kHz (burst length 0.75 ms) shall be used.

Degradation of the performance as described in criterion A is permitted in that errors are acceptable during the application of the test. However the application of the test shall not cause the system to lose the established connection or re-train. At the cessation of the test the system shall operate in the condition established prior to the application of the test without user intervention.

After the application of the EFT/B tests to the xDSL or AC mains port, the CRC error count shall not have increased by more than 600 when compared to the count prior to the application of the test.

#### Performance criterion C

Degradation of the performance as described in criteria A and B is permitted provided that the normal operation of the EUT is self-recoverable to the condition established prior to application of the test or can be restored after the test by the operator.

## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Conducted Emissions from Power Ports	9 kHz ~ 30 MHz	2.9 dB	3.4 dB ( $U_{\text{cispr}}$ )
Conducted Emissions from Wired Network Ports	150 kHz ~ 30 MHz	ISN Cat3 : 3.0 dB ISN Cat5 : 3.26 dB ISN Cat6 : 3.0 dB Current Probe : 1.56 dB Voltage Probe : 2.90 dB Coaxial : 2.34 dB	5.0 dB ( $U_{\text{cispr}}$ ) using AAN 2.9 dB ( $U_{\text{cispr}}$ ) using CP 3.9 dB ( $U_{\text{cispr}}$ ) using CVP
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	3m : 5.54 dB 10m : 4.16 dB	6.3 dB ( $U_{\text{cispr}}$ )
Radiated Emissions above 1 GHz	1 GHz ~ 6 GHz	4.64 dB	5.2 dB ( $U_{\text{cispr}}$ )

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

## 2.3 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 Description of EUT

Product	QEC
Brand	iCOP
Test Model	M
Series Model	02X-DXX ("X" can be A-Z, 0-9 or nil to indicate I/O port differentiation.)
Model Difference	Marketing Differentiation
Sample Status	Engineering sample
Power Supply Rating	DC 24V

#### 3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 533 MHz, provided by ICOP Technology Inc., for detailed internal source, please refer to the manufacturer's specifications.

#### 3.3 Features of EUT

The tests reported herein were performed according to the method specified by ICOP Technology Inc., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.

### 3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT has been pre-tested under following test modes.

Test Condition	
Mode	Radiated Emissions up to 1 GHz
1	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Note: There are both standby mode and normal mode to be pre-tested then normal mode has the highest emission value.	

Test modes are presented in the report as below.

Test Condition	
Mode	Conducted Emissions from Power Ports
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Conducted Emissions from Wired Network Ports
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Under test port(Lan_1Gbps link) + Input Power(24 Vdc)
B	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Under test port(EtherCAT IN link) + Input Power(24 Vdc)
C	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Under test port(EtherCAT OUT link) + Input Power(24 Vdc)
Note: The idle mode of conducted emission test at wired network ports test was pre-tested based on the worst case of link mode. Due to emissions of idle mode being very low compared to link mode, only the link mode data were presented in the test report.	
Mode	Radiated Emissions up to 1 GHz
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Radiated Emissions above 1 GHz
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Electrostatic Discharges (ESD)
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Radio Frequency Electromagnetic Field (RS)
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Fast Transients Common Mode (EFT)
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Surges
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Radio Frequency Common Mode (CS)
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)
Mode	Power Frequency Magnetic Field (PFMF)
A	Operating mode + HDMI out + EtherCAT IN/OUT link + Lan_1Gbps ping + Input Power(24 Vdc)

### 3.5 Test Program Used and Operation Descriptions

#### For Emission test


- a. Turned on the power of all equipment.
- b. Laptop sent and received message to/ from EUT via RS485 Adapter.
- c. EUT sent (H) messages to monitor, and then displayed messages on its screen.
- d. Laptop sent and received messages to/ from EUT via LAN cable.
- e. EUT sent and received messages to/ from another QEC via wire cable.
- f. Laptop sent (ITU-R BT 471-1) messages to panel, and then displayed messages on its screen.


#### For Immunity test

- a. Turned on the power of all equipment.
- b. Laptop sent and received message to/ from EUT via RS485 Adapter.
- c. EUT sent (H) messages to monitor, and then displayed messages on its screen.
- d. Laptop sent and received messages to/ from EUT via LAN cable.
- e. EUT sent and received messages to/ from another QEC via wire cable.
- f. Laptop sent (ITU-R BT 471-1) messages to panel, and then displayed messages on its screen.


### 3.6 Connection Diagram of EUT and Peripheral Devices

For Conducted, ISN tests

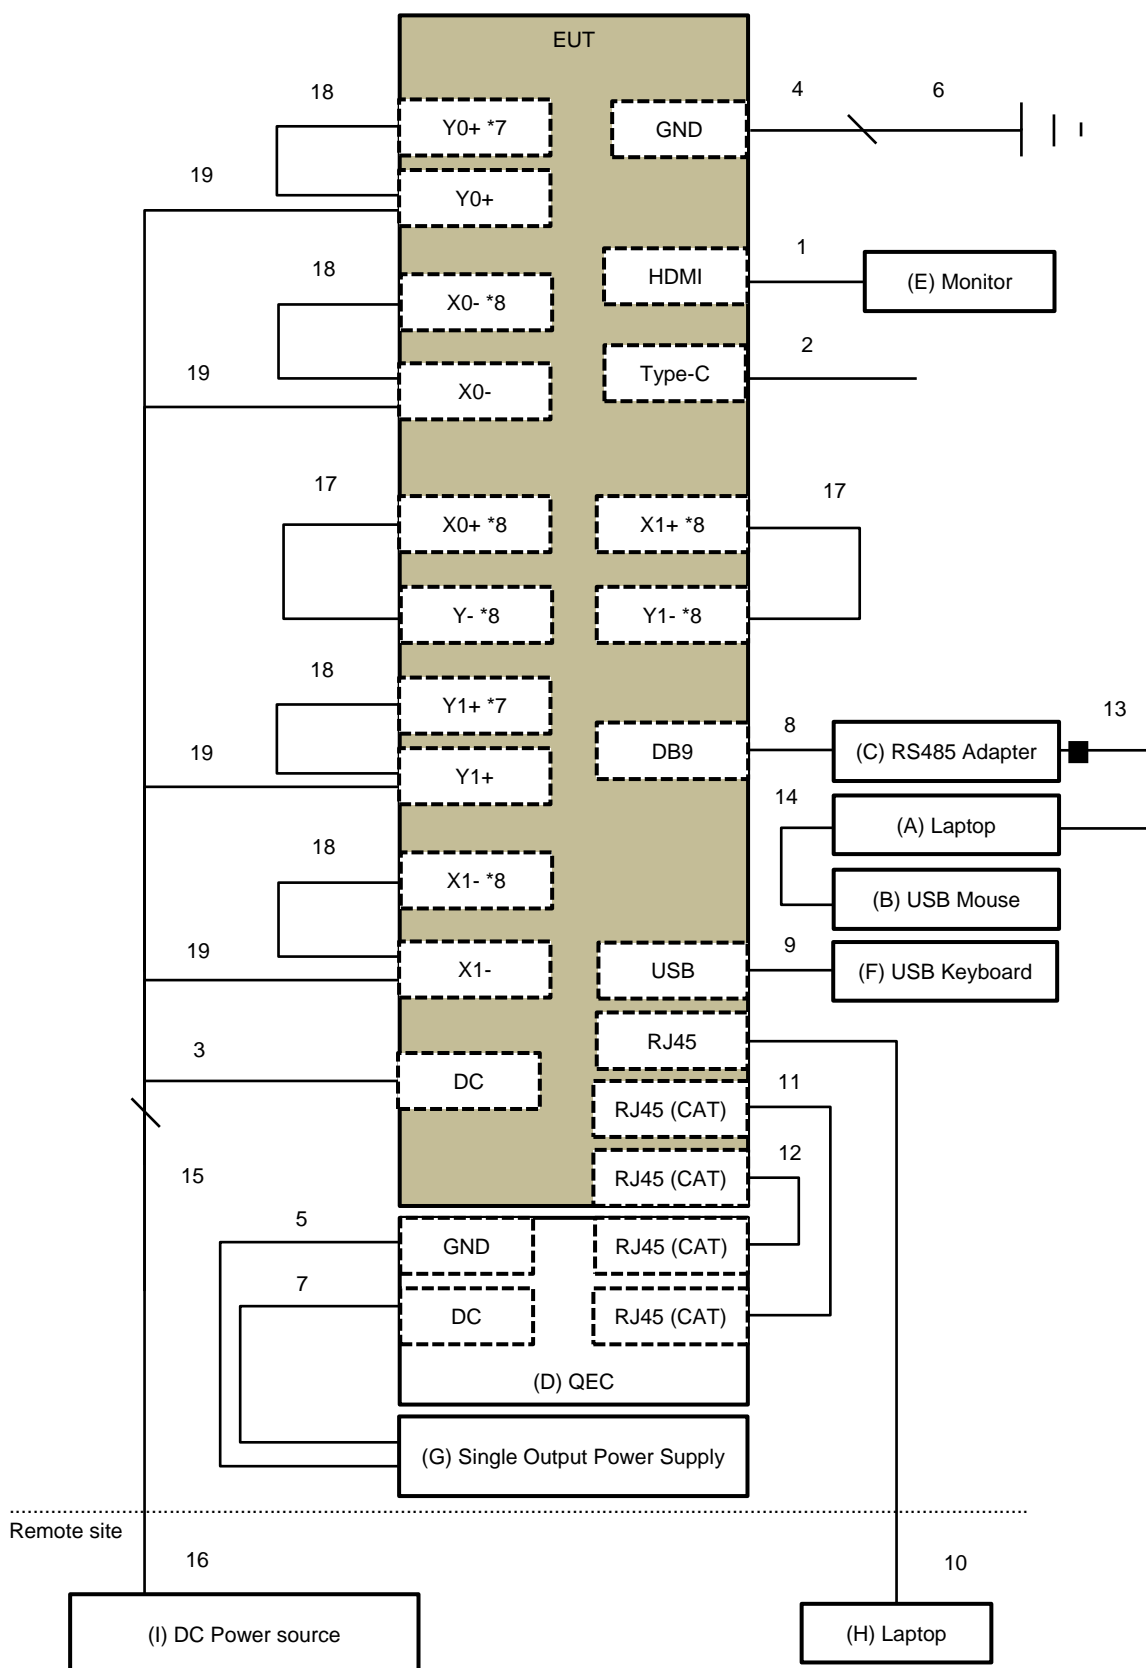



## For Immunity tests

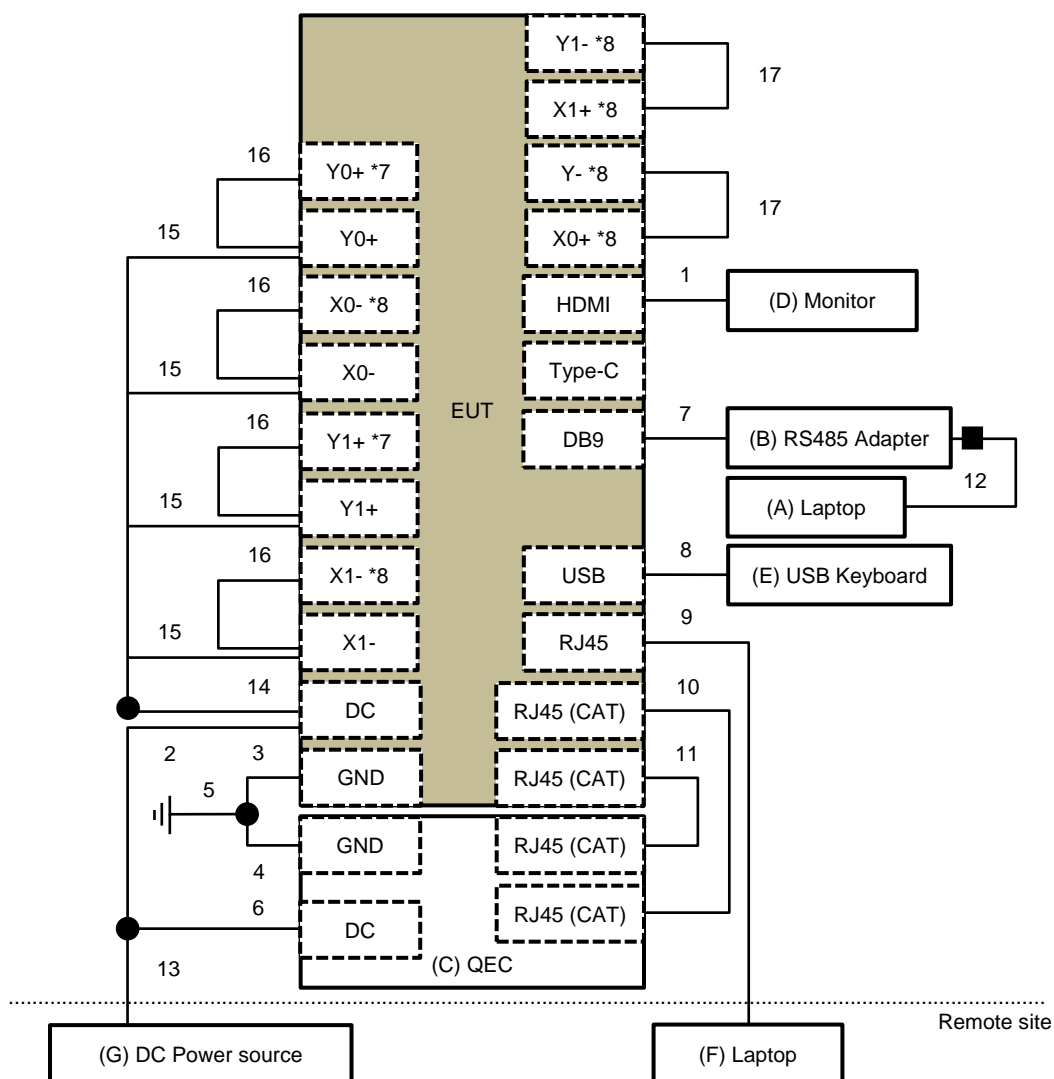

### 3.7 Configuration of Peripheral Devices and Cable Connections

#### For Emission test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	TP00050A	N/A	N/A	Supplied by applicant
B	USB Mouse	DELL	MOCZUL	CN-049TWY-PRC00-77B-007R	N/A	Provided by Lab
C	RS485 Adapter	SOYAL	AR-321-CM	N/A	N/A	Supplied by applicant
D	QEC	QEC	QEC-R11D88D-C	N/A	N/A	Supplied by applicant
E	Monitor	DELL	U2410	CN082WXD728720CC0KCL	DoC	Provided by Lab
F	USB Keyboard	Dell	KB216t	CN-0W33XP-LO300-7CL-1907	N/A	Provided by Lab
G	Single Output Power Supply	Agilent	U8002A	MY52140016	N/A	Provided by Lab
H	Laptop	LENOVO	T480	PF1EK03U	N/A	Provided by Lab
I	DC Power source	Chroma	62024P-80-60	62024PA00674	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	HDMI	1	2	Y	0	Provided by Lab
2	Type C	1	1	Y	0	Provided by Lab
3	Power	1	0.2	N	0	Supplied by applicant
4	GND (PE)	1	0.6	N	0	Supplied by applicant
5	GND (PE)	1	0.8	N	0	Supplied by applicant
6	GND (PE)	1	1.5	N	0	Provided by Lab
7	Power	1	0.4	N	0	Supplied by applicant
8	Data	1	0.6	N	0	Supplied by applicant
9	USB	1	1.8	Y	0	Provided by Lab
10	Cat. 5e	1	10	N	0	Provided by Lab
11	Cat. 5e	1	0.9	N	0	Supplied by applicant
12	Cat. 5e	1	0.9	N	0	Supplied by applicant
13	USB	1	0.9	Y	1	Supplied by applicant
14	USB	1	1.8	Y	0	Provided by Lab
15	Power	1	1.8	N	0	Provided by Lab
16	Power	1	10	N	0	Provided by Lab
17	Data	16	0.05	N	0	Supplied by applicant
18	Power	4	0.03	N	0	Supplied by applicant
19	Power	4	0.1	N	0	Supplied by applicant



### For Immunity test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	TP00050A	N/A	N/A	Supplied by applicant
B	RS485 Adapter	SOYAL	AR-321-CM	N/A	N/A	Supplied by applicant
C	QEC	QEC	QEC-R11D88D-C	N/A	N/A	Supplied by applicant
D	Monitor	DELL	P2415Qb	CN-OGTTPW-74261-662-OAAL	N/A	Provided by Lab
E	USB Keyboard	Dell	KB216t	CN-0W33XP-LO300-773-OBH9	N/A	Provided by Lab
F	Laptop	DELL	Latitude 5420	FHS33F3	N/A	Provided by Lab
G	DC Power source	Chroma	62024P-80-60	62024PA03093	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	HDMI	1	2	Y	0	Provided by Lab
2	Power	1	0.2	N	0	Supplied by applicant
3	GND (PE)	1	0.6	N	0	Supplied by applicant
4	GND (PE)	1	0.8	N	0	Supplied by applicant
5	GND (PE)	1	1.5	N	0	Provided by Lab
6	Power	1	0.4	N	0	Supplied by applicant
7	Data	1	0.6	N	0	Supplied by applicant
8	USB	1	1.8	Y	0	Provided by Lab
9	Cat. 5e	1	10	N	0	Provided by Lab
10	Cat. 5e	1	0.9	N	0	Supplied by applicant
11	Cat. 5e	1	0.9	N	0	Supplied by applicant
12	USB	1	0.9	Y	1	Supplied by applicant
13	Power	1	3	N	0	Provided by Lab
14	Power	2	0.1	N	0	Supplied by applicant
15	Power	4	0.1	N	0	Supplied by applicant
16	Power	4	0.03	N	0	Supplied by applicant
17	Data	16	0.05	N	0	Supplied by applicant

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 Conducted Emissions from Power Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011284	2024/9/16	2025/9/15
		E1-011286	2024/9/25	2025/9/24
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01587	2025/5/2	2026/5/1
EMI Test Receiver R&S	EPL 1000	101065	2025/4/22	2026/4/21
	ESR3	102414	2024/12/11	2025/12/10
Highpass filter EMCI	150HPF-ME	114005	2025/5/2	2026/5/1
		114006	2025/5/2	2026/5/1
	150HPF-MF	113009	2025/5/2	2026/5/1
LISN R&S	ENV216	101196	2025/5/19	2026/5/18
	ESH2-Z5	100104	2024/12/11	2025/12/10
	ESH3-Z5	847265/023	2024/10/23	2025/10/22
LISN Schwarzbeck	NNLK 8121	8121-00759	2024/8/20	2025/8/19
		8121-808	2025/4/23	2026/4/22
	NNLK 8129	00624	2024/10/9	2025/10/8
		8129229	2024/10/14	2025/10/13
RF Coaxial Cable PEWC	5D-FB	Cable-CO9-01	2025/7/4	2026/7/3
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 9.
2. The VCCI Site Registration No. C-11312.
3. Tested Date: 2025/7/14

## 4.2 Conducted Emissions from Wired Network Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011284	2024/9/16	2025/9/15
		E1-011286	2024/9/25	2025/9/24
Capacitive Voltage Probe FCC	F-CVP-1	94	2025/4/9	2026/4/8
DC LISN R&S	ESH3-Z6	100219	2025/7/10	2026/7/9
		844950/018	2025/7/10	2026/7/9
EMI Test Receiver R&S	EPL 1000	101065	2025/4/22	2026/4/21
	ESR3	102414	2024/12/11	2025/12/10
Impedance Stabilization Network TESEQ	ISN S751	40599	2024/8/15	2025/8/14
	ISN ST08	41212	2024/9/9	2025/9/8
	ISN T8_Cat.6	53159	2025/6/10	2026/6/9
	ISN T400A	28573	2024/8/26	2025/8/25
	ISN T800	36181	2024/8/27	2025/8/26
LISN R&S	ENV216	101196	2025/5/19	2026/5/18
	ESH2-Z5	100104	2024/12/11	2025/12/10
	ESH3-Z5	847265/023	2024/10/23	2025/10/22
LISN Schwarzbeck	NNLK 8121	8121-00759	2024/8/20	2025/8/19
		8121-808	2025/4/23	2026/4/22
	NNLK 8129	00624	2024/10/9	2025/10/8
		8129229	2024/10/14	2025/10/13
Matching Pad EMCI	EMCI-3PD5M75BF	N/A	2024/12/17	2025/12/16
RF Coaxial Cable PEWC	5D-FB	Cable-CO9-01	2025/7/4	2026/7/3
RF Current Probe FCC	F-33-4	56	2024/8/5	2025/8/4
Software BVADT	ISN_V7.4.1.0	N/A	N/A	N/A

### Notes:

1. The test was performed in Linkou Conduction 9(ISN 9).
2. The VCCI Site Registration No. T-11587.
3. Tested Date: 2025/7/14

### 4.3 Radiated Emissions up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
ADT. Tower	AT100	0205	N/A	N/A
ADT. Turn Table	TT100	0205	N/A	N/A
Bi_Log Antenna schaffner	CBL 6111D	22270	2024/10/8	2025/10/7
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2025/5/28	2026/5/27
	CDNE-M3	00091	2025/3/20	2026/3/19
EMI Test Receiver R&S	ESCS 30	100292	2024/9/18	2025/9/17
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ST2-01	2024/10/19	2025/10/18
Preamplifier HP	8447D	2727A05786	2025/2/14	2026/2/13
RF Coaxial Cable Pacific	8D-FB	Cable-ST2-01	2024/11/6	2025/11/5
Software BVADT	Radiated_V8.8.09	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Open Site2 , The test site validated date: 2024/7/13 (NSA)
2. The VCCI Site Registration No. R-10237.
3. Tested Date: 2025/7/2

#### 4.4 Radiated Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fix tool for Boresight antenna tower BV	BAF-01	9	N/A	N/A
Fixed Attenuator Mini-Circuits	BW-K3-2W44+	PAD-CH7-03	2025/7/4	2026/7/3
	BW-N4W5+	PAD-CH10-02	2025/7/4	2026/7/3
Horn Antenna EMCO	3115	6714	2024/11/10	2025/11/9
Horn Antenna ETS-Lindgren	3117-PA	00215857	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170190	2024/11/10	2025/11/9
MXA Signal Analyzer Keysight	N9020B	MY60110438	2024/12/5	2025/12/4
		MY60112260	2025/5/26	2026/5/25
Notch Filter Micro-Tronics	BRC50703-01	010	2025/5/22	2026/5/21
	BRM17690	005	2025/5/22	2026/5/21
Preamplifier EMCI	EMC0126545	980076	2025/2/14	2026/2/13
	EMC184045B	980235	2025/2/14	2026/2/13
Preamplifier HP	8449B	3008A01292	2025/2/14	2026/2/13
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2025/7/4	2026/7/3
	EM102-KMKM-350	01	2025/7/4	2026/7/3
Software BVADT	Radiated_V8.8.09	N/A	N/A	N/A
Turn Table & Tower Max Full	MF7802	MF780208216	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 3 (CH 10).
2. The VCCI Site Registration No. G-10427.
3. Tested Date: 2025/7/14

#### 4.5 Electrostatic Discharges (ESD)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Electrostatic Analog Tester TESEQ	NSG 438	1875	2024/11/11	2025/11/10
ESD Generator EM TEST	Dito//DM-150/330//DM-150/330-rfci	P1315117252/P1317117852	2025/7/7	2026/7/6
ESD Simulator EM TEST	Dito	V1203111608	2025/7/21	2026/7/20
ESD Simulator TESEQ	NSG 438	1364	2024/11/11	2025/11/10

Notes:

1. The test was performed in Linkou ESD Room No.01.
2. Tested Date: 2025/7/23

#### 4.6 Radio Frequency Electromagnetic Field (RS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Audio analyzer R&S	UPV	104934	2024/8/6	2025/8/5
Band Pass Filter B&K	WH3278	N/A	2024/11/20	2025/11/19
CHANCE MOST Full Anechoic Chamber (9x5x3m)	Chance Most	RS-002	2025/1/20	2026/1/19
Controller Amplifier Research	SC1000M3	305910	N/A	N/A
High Gain Horn Antenna Amplifier Research	AT4010	0329800	N/A	N/A
Isotropic EM Field Probe+EM Field Meter Wavecontrol	WPF18+SMP2	21WP090492+21SN1691	2025/1/21	2026/1/20
Log Periodic Antenna Amplifier Research	AT6080	0329465	N/A	N/A
Power Amplifier Amplifier Research	35S4G8AM4	0326094	N/A	N/A
Power Amplifier BONN	BSA 0125-800	1912556	N/A	N/A
Power sensor Boonton	51011-EMC	34152	2025/5/15	2026/5/14
		34153	2025/5/15	2026/5/14
Pressure-field Microphone B&K	4192	3190854	2024/12/12	2025/12/11
		3190855	2024/12/12	2025/12/11
RF Power Amplifier BONN	BLMA 1060-150	2214325C-02	N/A	N/A
	BLWA 0810-250	2214325A-01	N/A	N/A
RF Power Meter Boonton	4232A	10180	2025/5/15	2026/5/14
Signal Generator R&S	SMB100A	109279	2025/1/16	2026/1/15
Software BVADT	ABMS_Audio V7.4.10	N/A	N/A	N/A
	RS_V7.6.15	N/A	N/A	N/A
Stacked Log Periodic Antenna Schwarzbeck	STLP 9149	9149-260	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690-OS2	3001996	2024/11/20	2025/11/19
Wireless Connectivity Tester R&S	CMW270	101075	2025/7/14	2026/7/13

Notes:

1. The test was performed in Linkou RS Room No.02.
2. Tested Date: 2025/7/22

#### 4.7 Fast Transients Common Mode (EFT)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Capacitive Coupling clamp EMC PARTNER	CN-EFT1000	352	2025/4/14	2026/4/13
EFT CDN TESEQ	CDN 3083-B100	303	2025/4/14	2026/4/13
EFT coupling / Decoupling Network TESEQ	PCD 8 b-3-690-1000-200	P2435291617	2024/12/18	2025/12/17
Surge & EFT Generators TESEQ	NSG 3060 / CDN 3061	1572 / 1463	2025/4/14	2026/4/13

Notes:

1. The test was performed in Linkou EMS Room No.02.
2. Tested Date: 2025/7/22

#### 4.8 Surges

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
CDN for Unshielded Unsymmetrical Signal & Data Lines TESEQ	CDN117	40144	2024/8/26	2025/8/25
Coupling / Decoupling Network TESEQ	CDN 118-T8	40386	2024/8/26	2025/8/25
	CDN HSS-2	41009	2025/4/14	2026/4/13
Surge & EFT Generators TESEQ	NSG 3060 / CDN 3061	1572 / 1463	2025/4/14	2026/4/13
Surge CDN TESEQ	CDN 3083-S100	1215	2025/4/14	2026/4/13

Notes:

1. The test was performed in Linkou EMS Room No.02.
2. Tested Date: 2025/7/22

#### 4.9 Radio Frequency Common Mode (CS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Audio analyzer R&S	UPV	104934	2024/8/6	2025/8/5
Band Pass Filter B&K	WH3278	N/A	2025/6/9	2026/6/8
CDN Calibration Kit TESEQ	CDN T8S	29459	2025/2/18	2026/2/17
Coupling / Decoupling Network EM TEST	CDN M1/32A	306508	2025/2/18	2026/2/17
	CDN T2	306509	2025/2/18	2026/2/17
Coupling / Decoupling Network FCC	FCC-801-M2-16A	01047	2025/2/18	2026/2/17
	FCC-801-M5-50A	100018	2025/1/15	2026/1/14
Coupling / Decoupling Network TESEQ	CDN M3-100-750V	69836	2024/10/11	2025/10/10
	CDN M5-100-750V	69834	2024/10/11	2025/10/10
	CDN M232	37702	2025/2/18	2026/2/17
	CDN M332	41256	2025/2/18	2026/2/17
		41258	2025/2/18	2026/2/17

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
	CDN M432S	56519	2025/2/18	2026/2/17
	CDN S751A	56435	2025/2/18	2026/2/17
		56436	2025/2/18	2026/2/17
	CDN ST08A	56525	2025/2/18	2026/2/17
		56527	2025/2/18	2026/2/17
	CDN T8-10	40376	2025/2/18	2026/2/17
	CDN T8-230	56641	2024/9/27	2025/9/26
		56642	2024/9/27	2025/9/26
	CDN T400A	49918	2025/2/18	2026/2/17
	CDN T800	34428	2025/2/18	2026/2/17
Current Clamp FCC	F-120-9A	361	2024/8/19	2025/8/18
FCC EM Injection Clamp FCC	F-203I-23mm	455	N/A	N/A
Fixed Attenuator SGH	VFA_Z-06H20-N2-06	01	N/A	N/A
Power Amplifier BONN	BSA 0125-125	2314648	N/A	N/A
Power Sensor R&S	NRV-Z5	837878/039	2024/10/12	2025/10/11
Pressure-field Microphone B&K	4192	3190854	2024/12/12	2025/12/11
		3190855	2024/12/12	2025/12/11
RF Power Meter R&S	NRVD	837794/040	2024/10/12	2025/10/11
Signal Generator R&S	SMB100A	105489	2024/8/27	2025/8/26
Software BVADT	ABMS_Audio V7.4.10	N/A	N/A	N/A
	BVADT_CS_V7.6.6	N/A	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690-OS2	2645274	2025/6/9	2026/6/8
Wideband Radio Communication Tester R&S	CMW500	170333	2024/12/23	2025/12/22

Notes:

1. The test was performed in Linkou CS Room No.1.
2. Tested Date: 2025/7/22

#### 4.10 Power Frequency Magnetic Field (PFMF)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
* Gaussmeter F.W. Bell	4190	0743043	2024/4/19	2026/4/18
Magnetic Field Test System Haefely Trench AG	MAG 100	083794-06	2024/8/26	2025/8/25

Notes:

1. \* The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA
2. The test was performed in Linkou EMS Room No.1.
3. Tested Date: 2025/7/23



## 5 Limits of Test Items

### 5.1 Conducted Emissions from Power Ports

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Conducted Emissions from Wired Network Ports

Frequency (MHz)	Coupling Device	Class A				Class B			
		Voltage Limit (dBuV)		Current limits (dBuA)		Voltage Limit (dBuV)		Current limits (dBuA)	
		Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	AAN	97-87	84-74	-	-	84-74	74-64	-	-
0.5-30		87	74	-	-	74	64	-	-
0.15-0.5	CVP and Current probe	97-87	84-74	53-43	40-30	84-74	74-64	40-30	30-20
0.5-30		87	74	43	30	74	64	30	20
0.15-0.5	Current Probe	-	-	53-43	40-30	-	-	40-30	30-20
0.5-30		-	-	43	30	-	-	30	20

Note: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

### 5.3 Radiated Emissions up to 1 GHz

Frequency (MHz)	Class A Quasi-peak (dBuV/m)		Class B Quasi-peak (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	50	40	40	30
230 - 1000	57	47	47	37

#### For radiated emissions from FM receivers only (Measurement Facility: OATS/SAC)

Frequency (MHz)	Fundamental (dBuV/m)		Harmonics (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	60	50	52	42
230 - 300	60	50	52	42
300 - 1000	60	50	56	46

Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 5.4 Radiated Emissions above 1 GHz

Frequency (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Average	Peak	Average	Peak
1 to 3	56	76	50	70
3 to 6	60	80	54	74

- Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### Frequency Range of Radiated Measurement (For unintentional radiators)

Highest internal frequency ( $F_x$ )	Highest measurement frequency ( $F_m$ ) (GHz)
$F_x \leq 108 \text{ MHz}$	1
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5
$F_x > 1 \text{ GHz}$	5 x $F_x$ up to a maximum of 6 GHz

$F_x$  is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

## 5.5 General immunity requirements

For EN 55035

Port	Basic Standard	Test item	Test specification	Performance criteria
Power input (AC)	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	±1 kV 5/50 ns (Tr/Th) 5 kHz, repetition frequency	B
	IEC 61000-4-5	Surge	Line to line: ±1 kV, 1.2/50 µs Line to earth: ±2 kV, 1.2/50 µs	B
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15-10 MHz, 3 V, 80% AM (1 kHz), 10-30 MHz, 3 V-1 V, 80% AM (1 kHz), 30-80 MHz, 1 V, 80% AM (1 kHz),	A
	IEC 61000-4-11	Voltage dips and interruptions (DIP)	<b>Voltage Dips:</b> < 5% residual voltage, 0.5 cycle 70% residual voltage, 25 cycles (at 50 Hz) <b>Voltage Interruption:</b> < 5% residual voltage, 250 cycles (at 50 Hz)	B C C
DC power/ Wired network and Signal/ Control port	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	±0.5 kV 5/50 ns (Tr/Th) 100 kHz, repetition frequency for xDSL port 5 kHz, repetition frequency for other port	B
	IEC 61000-4-5	Surge	<b>Wired network ports</b> (directly connected to outdoor cables): Symmetrically operated: 10/700 µs w/o primary protectors: ±1.0 kV, or with primary protectors fitted: ±1.0 kV and ±4.0 kV, Coaxial or shielded operated: 1.2/50 µs shield to ground: ±0.5 kV,	C
			<b>DC power ports</b> (directly connected to outdoor cables): 1.2/50 µs each individual line to earth, or shield to ground: ±0.5 kV,	B
				B
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15-10 MHz, 3 V, 80% AM (1 kHz), 10-30 MHz, 3 V-1 V, 80% AM (1 kHz), 30-80 MHz, 1 V, 80% AM (1 kHz),	A
		Broadband impulse noise disturbances (Applicable only to xDSL ports.)	<b>Repetitive :</b> Impulse frequency profile : 0.15 – 0.5 MHz, 107 dBuV ; 0.5 – 10 MHz, 107 – 36 dBuV ; 10 – 30 MHz, 36 – 30 dBuV Burst duration : 0.70 ms Burst period : 10 ms (for 50 Hz) At least 2 minutes for each port under test. <b>Isolated :</b> Impulse frequency profile : 0.15 – 30 MHz, 110 dBuV Burst duration : 0.24 ms, 10 ms and 300 ms Isolated impulses : 5 times Interval : at least 60 seconds	A B


Port	Basic Standard	Test item	Test specification	Performance criteria
Enclosure	IEC 61000-4-2	Electrostatic Discharge (ESD)	±4 kV (contact) ±8 kV (Air)	B
	IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Swept Frequency Test: 80 to 1000(MHz), 3 V/m, 80% AM (1 kHz) Spot Frequency Test: 1800, 2600, 3500, 5000 MHz (±1%), 3 V/m, 80% AM (1 kHz)	A
	IEC 61000-4-8	Power Frequency Magnetic Field (PFMF)	1 A/m, 50 Hz	A

## 6 Test Arrangements

## 6.1 Conducted Emissions from Power Ports

- a. The EUT is placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN), or an Artificial Network (AN) as specified in CISPR 25 if used in a vehicle. Other support units are connected to the power mains through another LISN and/or AN. They provide coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

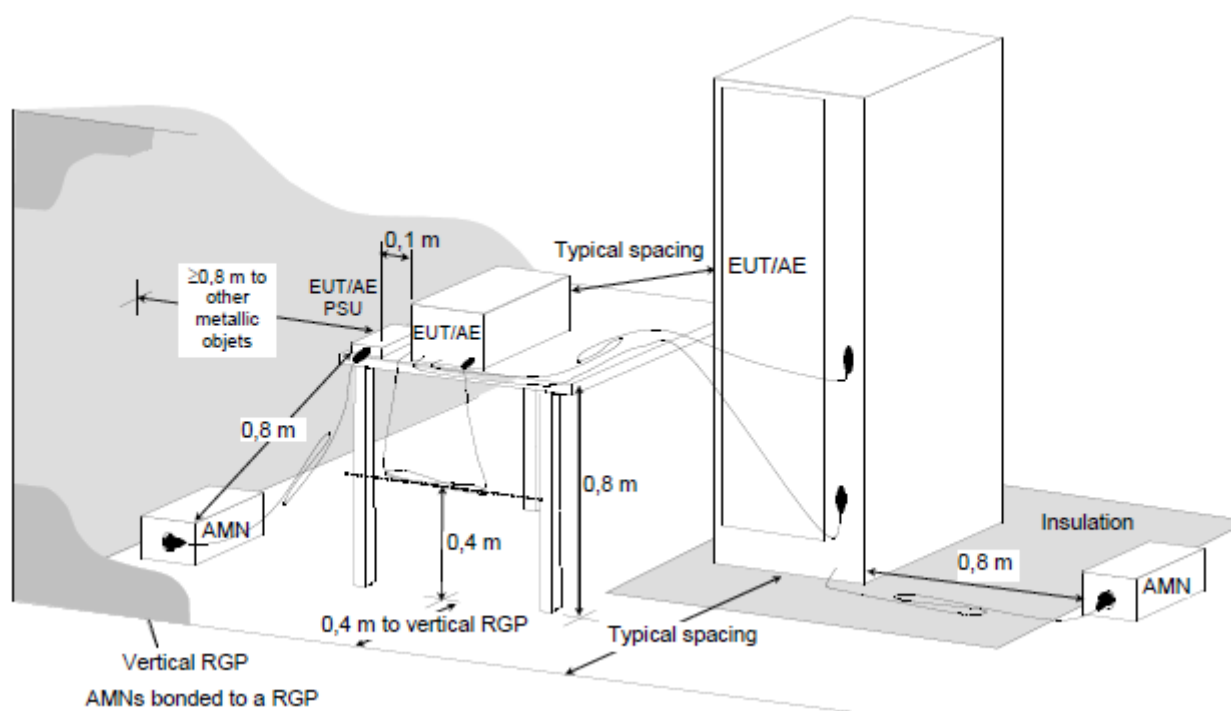


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

## 6.2 Conducted Emissions from Wired Network Ports

### Method of Using AANs:

- The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AAN directly to reference ground plane.
- If voltage measurement is used, measure voltage at the measurement port of the AAN, correct the reading by adding the AAN voltage division factor, and compare to the voltage limit.
- It is not necessary to apply the current limit if a AAN is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

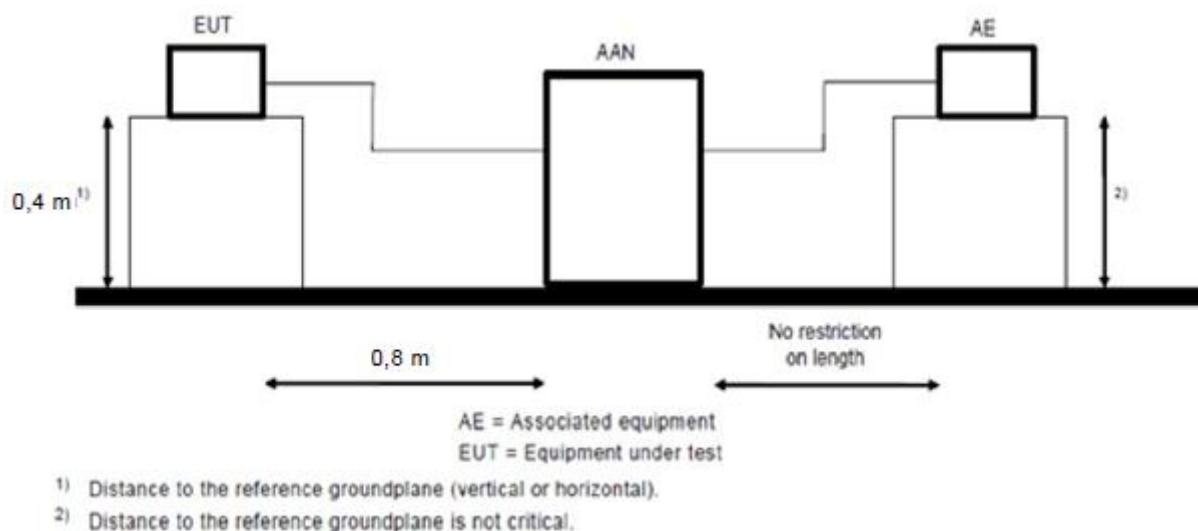


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### Method of Using a combination of Current Probe and 150 $\Omega$ load to the outside surface of the shielding cable:

- Breaks the external protective insulation (exposing the shield) and connect a 150 $\Omega$  resistor from the outside surface of the shield to ground.
- A current probe shall be placed at 0.1 m from the 150 $\Omega$  resistor. The current probe to EUT horizontal distance is between 0.3 m to 0.8 m.
- If current measurement is used, measure current at the measurement port of the current probe, correct the reading by adding the current probe division factor, and compare to the current limit.
- It is not necessary to apply the voltage limit if a current probe is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

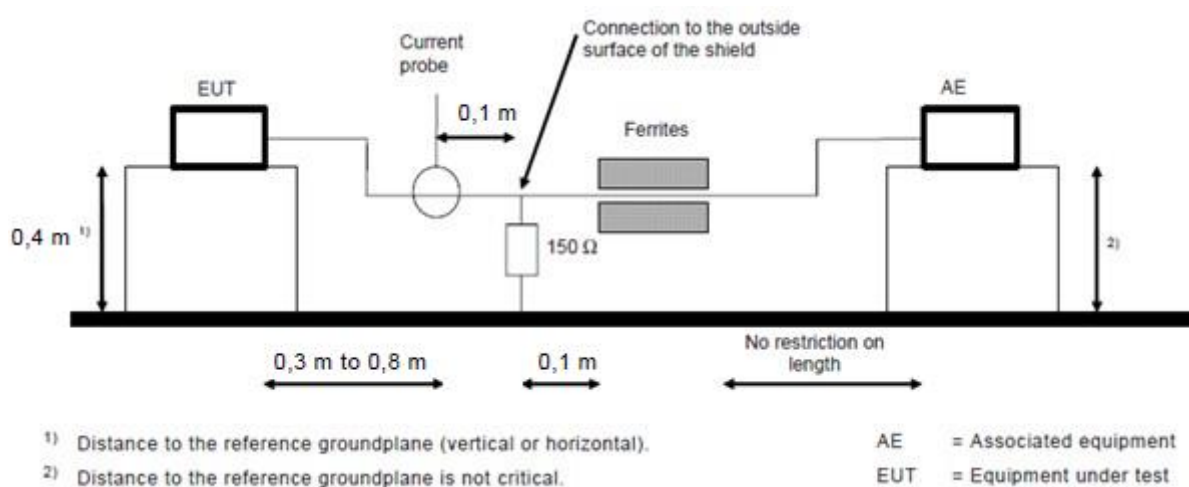


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### Method of Using a combination of current probe and capacitive voltage probe:

- a. Measure current with a current probe.
- b. Compare the measured current with the applicable current limit.
- c. Measure voltage with a capacitive voltage probe as specified in 5.2.2 of CISPR 16-1-2.
- d. Adjust the measured voltage as follows:
  - current margin  $\leq 6$  dB – subtract the actual current margin from measured voltage;
  - current margin  $> 6$  dB – subtract 6 dB from measured voltage.
- e. Compare adjusted voltage with the applicable voltage limit
- f. Both the measured current and the adjusted voltage shall be below the applicable
- g. The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

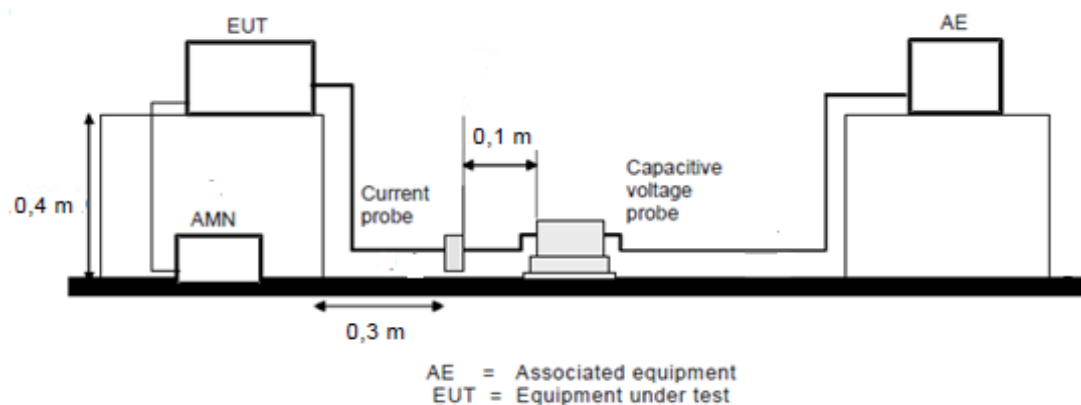


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



### 6.3 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT is set 10 meters away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1 m to 4 m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

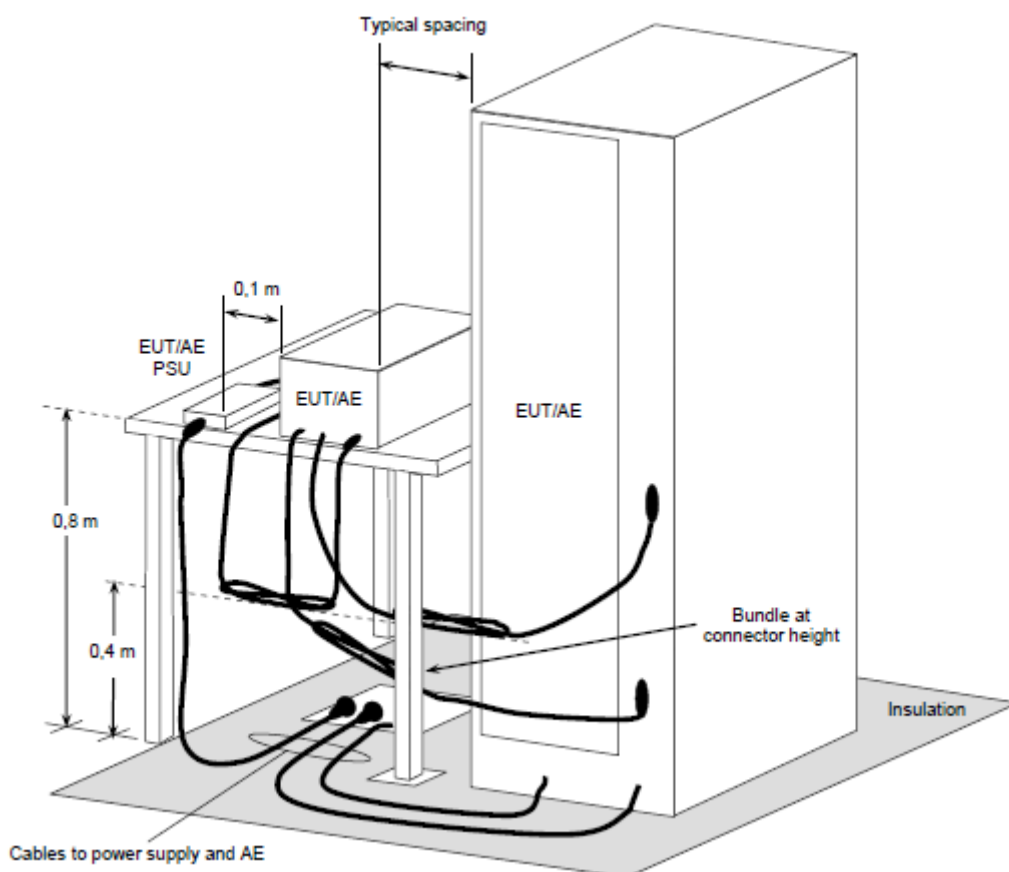


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 6.4 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set  $d = 3$  meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3 dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1 GHz.

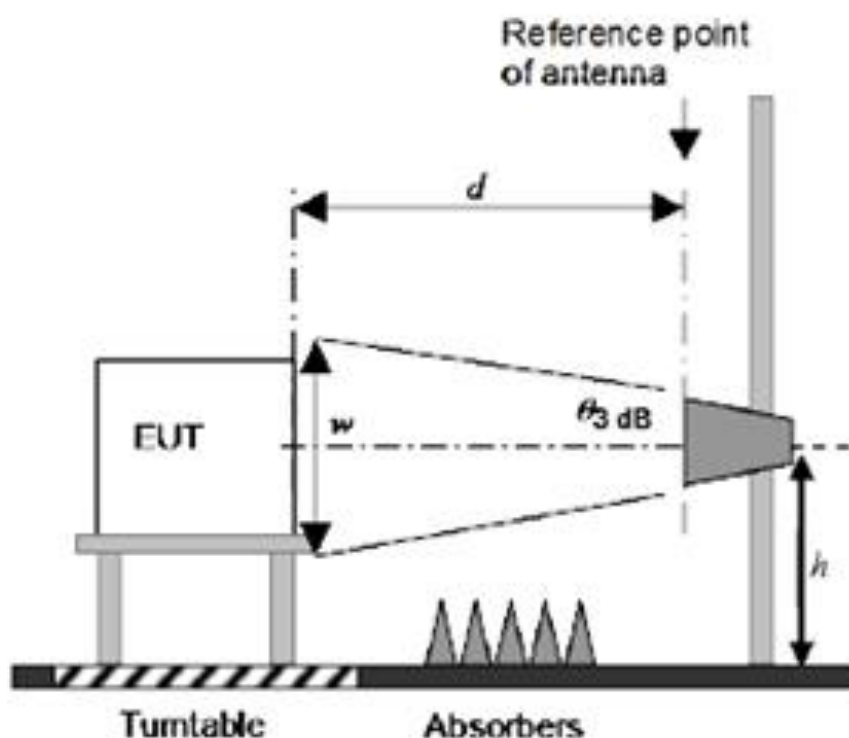


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

## 6.5 Electrostatic Discharges (ESD)

<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Number of Discharge:</b>	Air – Direct: 10 discharges per location (each polarity) Contact – Direct & Indirect: 10 discharges per location (each polarity)
<b>Discharge Period:</b>	1-second minimum

The basic test procedure was in accordance with EN/IEC 61000-4-2:

- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

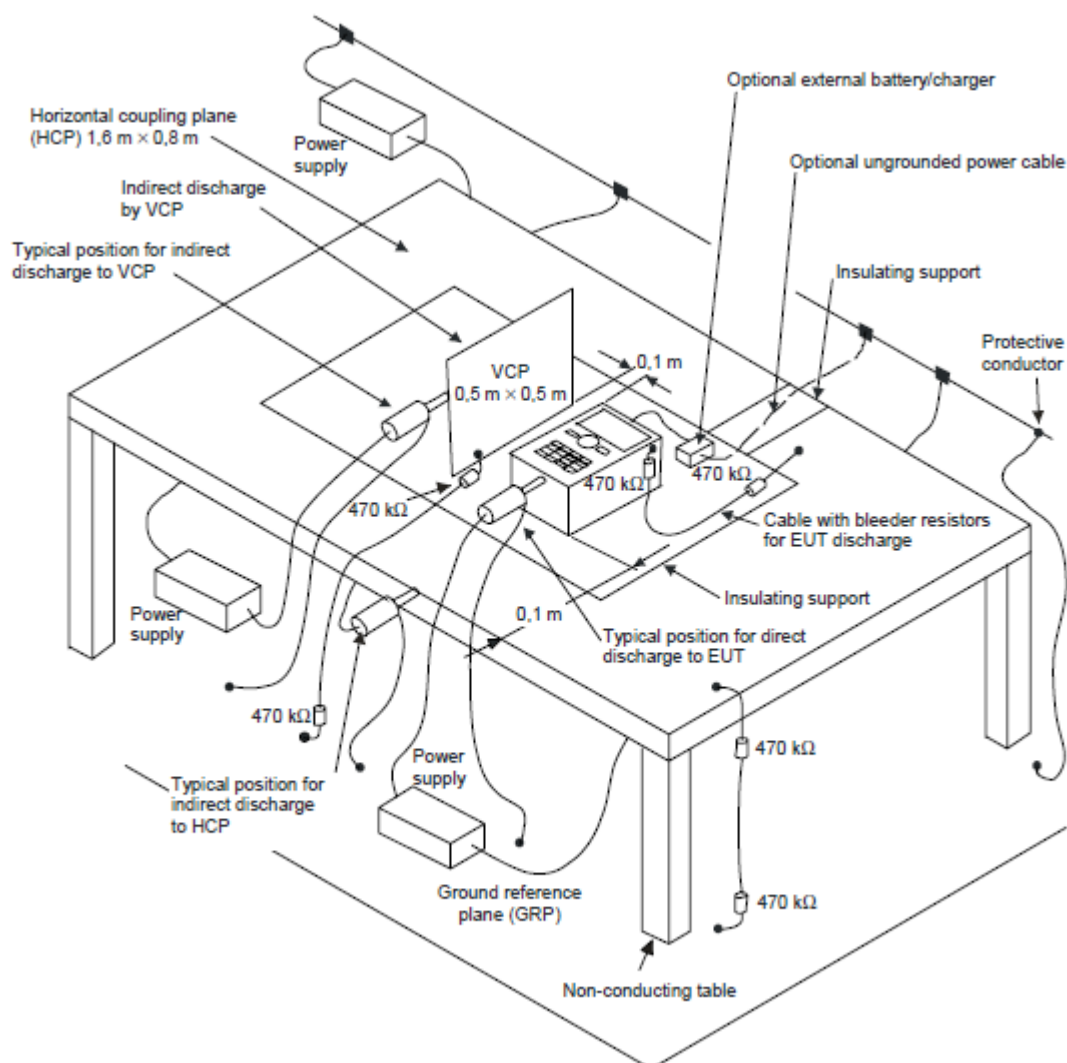

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### **NOTE:**

#### **TABLE-TOP EQUIPMENT**

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN/IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

#### **FLOOR-STANDING EQUIPMENT**


The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 m.

## 6.6 Radio Frequency Electromagnetic Field (RS)

Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time:	3 seconds

The test procedure was in accordance with EN/IEC 61000-4-3.

- The testing was performed in a modified semi-anechoic chamber.
- The frequency range shall be swept, with the signal 80% amplitude modulated with a 1kHz sine wave.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

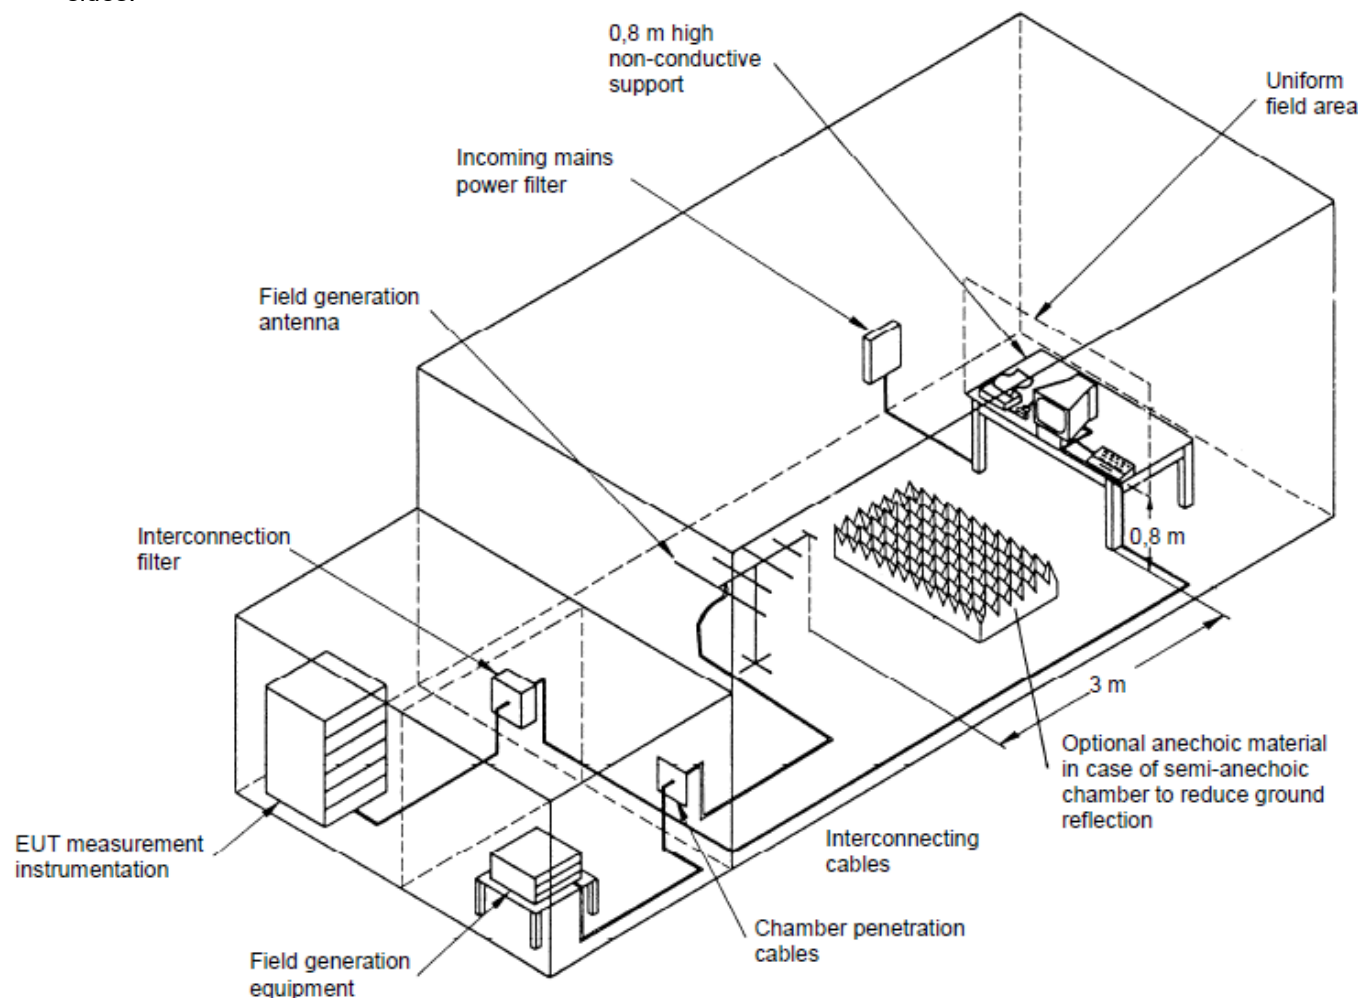

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### **TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.


#### **FLOOR STANDING EQUIPMENT**

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

## 6.7 Fast Transients Common Mode (EFT)

Impulse Repetition Frequency:	xDSL telecommunication port: 100kHz others: 5kHz
Impulse Wave Shape:	5/50 ns
Burst Duration:	0.75 ms for 100kHz Repetition Frequency 15 ms for 5kHz Repetition Frequency
Burst Period:	300 ms
Test Duration:	1 min.

- Both positive and negative polarity discharges were applied.
- The distance between any coupling devices and the EUT should be 0.5 m for table-top equipment testing, and 1.0 m for floor standing equipment.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with EN/IEC 61000-4-4, 5/50 ns.

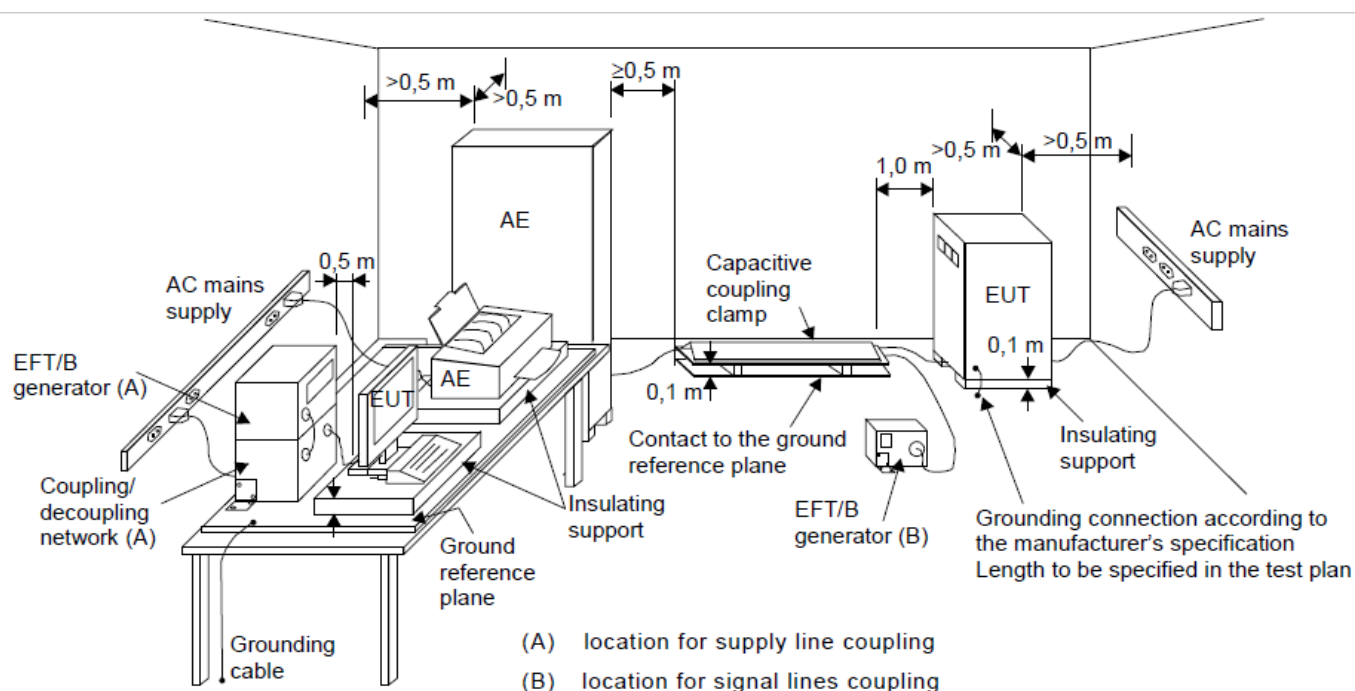

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.8 Surges

Wave-Shape:	<b>Wired network ports (direct to outdoor cables):</b> <b>Symmetrically operated:</b> 10/700 $\mu$ s Open Circuit Voltage 5/320 $\mu$ s Short Circuit Current <b>Non-symmetrically operated:</b> 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current <b>Shielded cables (direct to outdoor cables):</b> 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current <b>Wired network ports (indoor cables, longer than 30m):</b> 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current <b>Input DC power port (direct to outdoor cables):</b> 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current <b>Input AC power port:</b> 1.2/50 $\mu$ s Open Circuit Voltage 8/20 $\mu$ s Short Circuit Current
Pulse Repetition Rate:	20 sec.
Number of Tests:	5 positive and 5 negative at selected points

### a. EUT Power ports:

The surge shall be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling network shall not exceed 2 meters in length.

For double-insulated products without PE or external earth connections, the test shall be done in a similar way as for grounded products but without adding any additional external grounded connections. If there are no other possible connections to earth, line-to-ground tests may be omitted.

### b. Wired network ports

#### ● Unshielded unsymmetrical interconnection lines:

The coupling / decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling network shall not exceed 2 meters in length.

No line-to-ground surges are applied for double-insulated products (i.e. products without any dedicated earth terminal).

#### ● Unshielded symmetrical interconnection lines:

For symmetrical interconnection lines and high-speed interconnection lines, the CDN shall be selected to match the number of lines/pairs existing the cable. If coupling arrestors are use, test levels below the ignition point of the coupling arrestor cannot be specified.

The interconnection line between the EUT and the coupling/decoupling networks shall not exceed 2 meters in length.

In order to avoid the coupling and decoupling capacitors having a filtering effect on the data transfer, a balanced high frequency design associating the coupling capacitors with coupling chokes is required. Where normal functioning of high speed communications lines cannot be achieved because of the impact of the CDN on the EUT, product committees should specify appropriate operation or that no surge immunity test is required.

#### ● Shielded lines:

The EUT is isolated from ground and the surge is applied to its metallic enclosure; the termination (or auxiliary equipment) at the port(s) under test is grounded. This test applies to equipment with one or more shielded cables.

The length of the cable between the port(s) under test and the device attached to the other end of the cable (AE in Figure 12) shall be:

- 20 m (preferred length) or,
- the shortest length over 10 m, where the manufacturer provides pre-assembled cables used in actual installations.

No test shall be required for cables which according to the manufacturer's specification are  $\leq 10$  m.


Rules for application of the surge to shielded lines:

- a) Shields grounded at both ends:
- the test shall be carried out.

The test level is applied on shields with a 2  $\Omega$  generator source impedance and with the 18  $\mu$ F capacitor.

- b) Shields grounded at one end:
- the test shall be carried out according to unshielded unsymmetrical interconnection lines or unshielded symmetrical interconnection lines because the shield does not provide any protection against surges induced by magnetic fields.

For EUTs which do not have metallic enclosures, the surge is applied directly to the shielded cable at the EUT side.

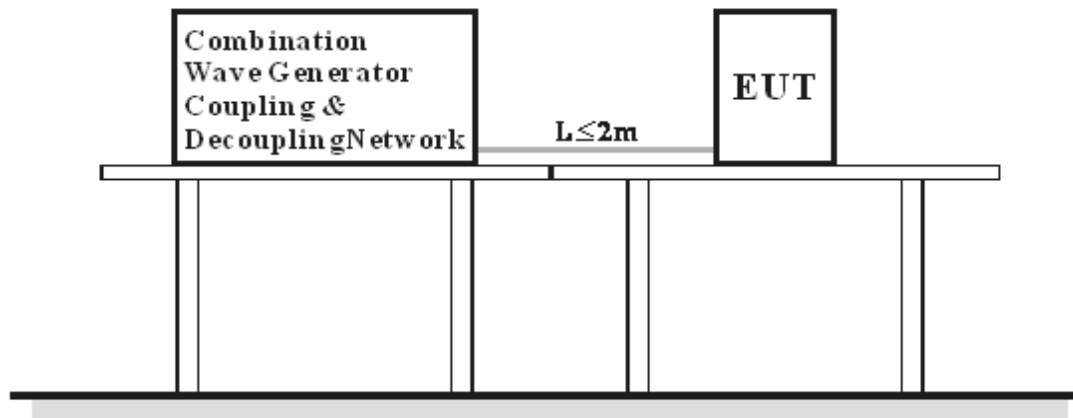


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



## 6.9 Radio Frequency Common Mode (CS)

<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of preceding frequency value
<b>Dwell Time</b>	3 seconds


- The EUT shall be tested within its intended operating and climatic conditions.
- An artificial hand was placed on the hand-held accessory and connected to the ground reference plane.
- One of the CDNs not used for injection was terminated with 50 ohm, providing only one return path. All other CDNs were coupled as decoupling networks.
- The frequency range shall be swept, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. Where the frequency is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.
- Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

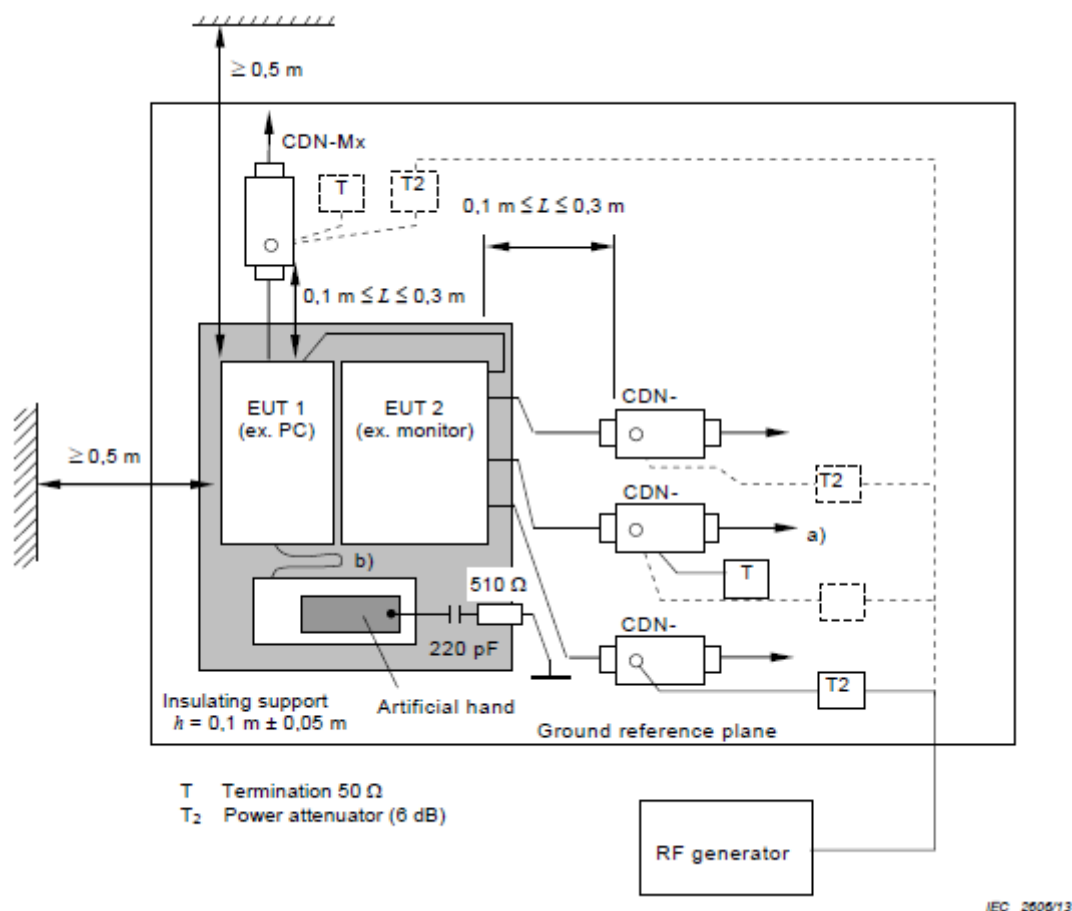

**Note:** 1. The EUT clearance from any metallic obstacles shall be at least 0,5 m.  
2. Interconnecting cables ( $\leq 1$  m) belonging to the EUT shall remain on the insulating support.  
For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**Broadband impulse noise disturbances, Repetitive and Isolated** (Applicable only to xDSL ports.)

- a. The EUT shall be tested within its intended operating and climatic conditions.
- b. An artificial hand was placed on the hand-held accessory and connected to the ground reference plane.
- c. One of the CDNs not used for injection was terminated with 50 ohm, providing only one return path. All other CDNs were coupled as decoupling networks.
- d. For the repetitive impulse test the disturbance shall be applied for a period of at least 2 minutes for each port under test.
- e. For the isolated impulse test a minimum of 5 isolated impulses shall be applied with an interval of at least 60 seconds between successive impulses.
- f. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

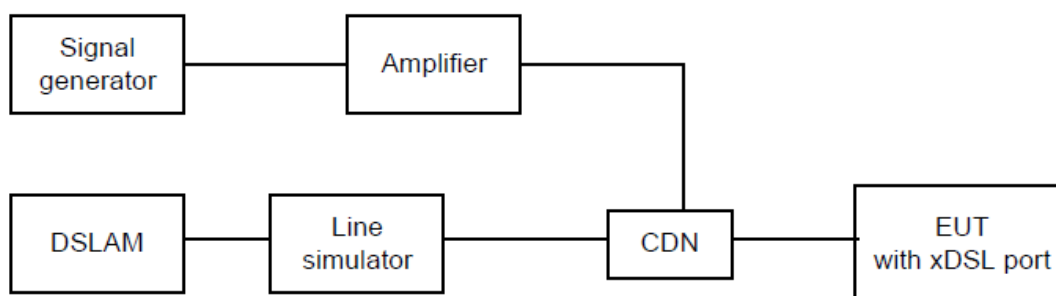



**Example schematic of the broadband impulsive conducted disturbances test setup**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.10 Power Frequency Magnetic Field (PFMF)

<b>Observation Time:</b>	1 minute
<b>Inductance Coil:</b>	Rectangular coil, 1 m x 1 m (L x W) or 2.6 m x 1 m (L x W)

- The equipment is configured and connected to satisfy its functional requirements.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

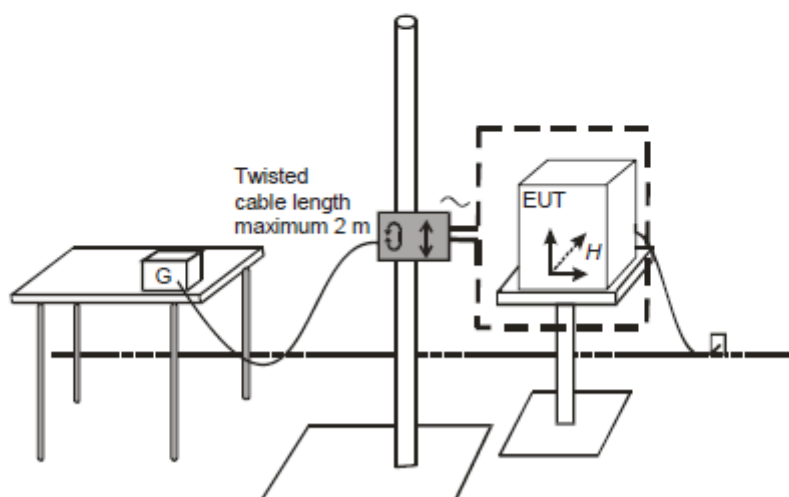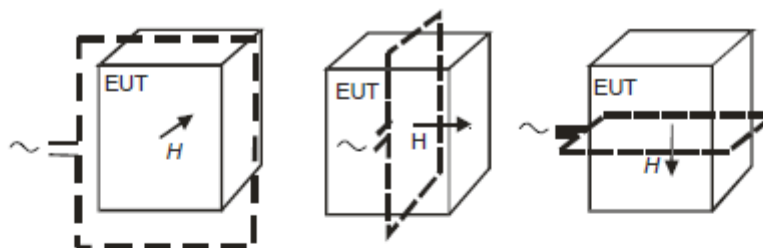

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 7 Test Results of Test Item

### 7.1 Conducted Emissions from Power Ports


#### Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 73% RH, 995.4 mbar
Tested by	Ed Lin		

Phase Of Power : Positive (+)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36902	10.11	52.40	48.95	62.51	59.06	79.00	66.00	-16.49	-6.94
2	0.73466	10.13	40.78	40.50	50.91	50.63	73.00	60.00	-22.09	-9.37
3	1.46993	10.17	32.33	32.03	42.50	42.20	73.00	60.00	-30.50	-17.80
4	2.20520	10.20	34.45	34.29	44.65	44.49	73.00	60.00	-28.35	-15.51
5	7.71814	10.33	37.02	36.55	47.35	46.88	73.00	60.00	-25.65	-13.12
6	8.82105	10.35	37.60	37.12	47.95	47.47	73.00	60.00	-25.05	-12.53

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

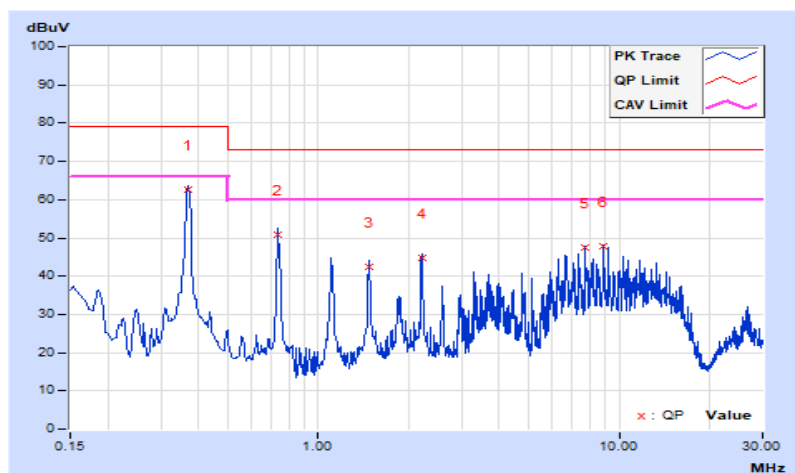


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 73% RH, 995.4 mbar
Tested by	Ed Lin		

Phase Of Power : Negative (-)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36902	10.11	52.63	49.12	62.74	59.23	79.00	66.00	-16.26	-6.77
2	0.73466	10.13	41.02	40.53	51.15	50.66	73.00	60.00	-21.85	-9.34
3	1.46993	10.16	32.41	31.83	42.57	41.99	73.00	60.00	-30.43	-18.01
4	2.20520	10.20	34.27	34.01	44.47	44.21	73.00	60.00	-28.53	-15.79
5	7.72206	10.32	37.03	36.57	47.35	46.89	73.00	60.00	-25.65	-13.11
6	8.82647	10.35	37.44	36.79	47.79	47.14	73.00	60.00	-25.21	-12.86

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

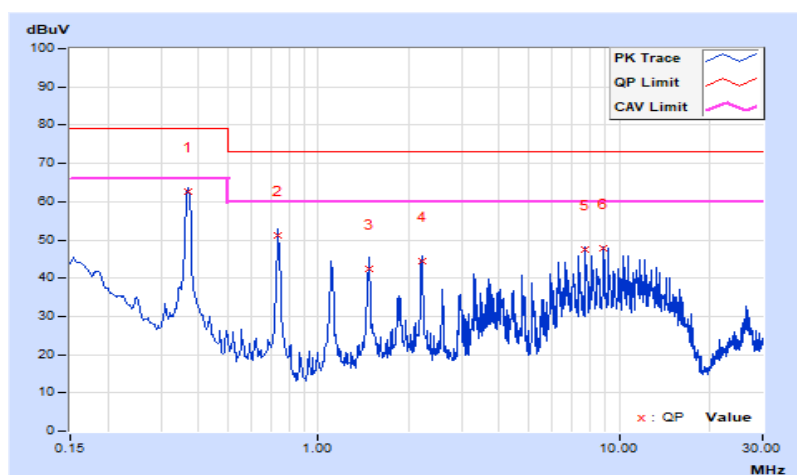

## 7.2 Conducted Emissions from Wired Network Ports


### Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 73% RH, 995.4 mbar
Tested by	Ed Lin		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.74248	9.91	41.92	36.46	51.83	46.37	87.00	74.00	-35.17	-27.63
2	1.11053	9.85	43.64	38.12	53.49	47.97	87.00	74.00	-33.51	-26.03
3	1.85712	9.81	44.08	38.47	53.89	48.28	87.00	74.00	-33.11	-25.72
4	3.40978	9.78	41.52	35.74	51.30	45.52	87.00	74.00	-35.70	-28.48
5	10.30332	9.79	41.73	37.57	51.52	47.36	87.00	74.00	-35.48	-26.64
6	21.34407	10.01	40.68	35.66	50.69	45.67	87.00	74.00	-36.31	-28.33

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

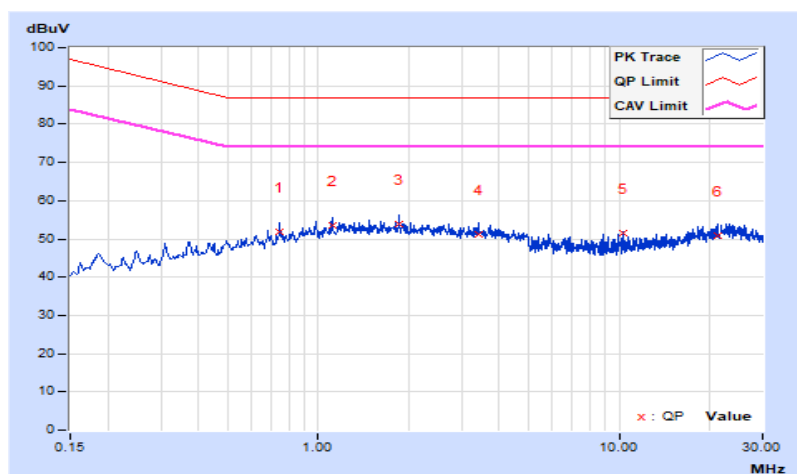


## Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 73% RH, 995.4 mbar
Tested by	Ed Lin		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	1.48661	9.83	42.24	39.02	52.07	48.85	87.00	74.00	-34.93	-25.15
2	3.64444	9.78	44.85	40.10	54.63	49.88	87.00	74.00	-32.37	-24.12
3	16.22848	9.89	51.70	49.52	61.59	59.41	87.00	74.00	-25.41	-14.59
4	19.70927	9.96	53.48	49.98	63.44	59.94	87.00	74.00	-23.56	-14.06
5	23.12749	10.06	55.59	52.81	65.65	62.87	87.00	74.00	-21.35	-11.13
6	26.48703	10.16	55.13	51.85	65.29	62.01	87.00	74.00	-21.71	-11.99

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

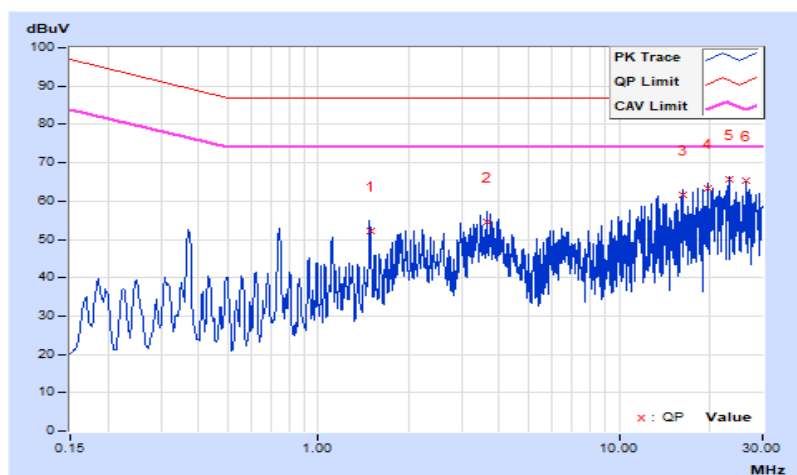


## Mode C

<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	24 Vdc	<b>Environmental Conditions</b>	24 °C, 73% RH, 995.5 mbar
<b>Tested by</b>	Ed Lin		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	1.02342	9.86	54.83	54.80	64.69	64.66	87.00	74.00	-22.31	-9.34
2	1.26656	9.84	54.39	54.35	64.23	64.19	87.00	74.00	-22.77	-9.81
3	1.81770	9.81	47.85	47.27	57.66	57.08	87.00	74.00	-29.34	-16.92
4	5.90735	9.78	54.16	53.81	63.94	63.59	87.00	74.00	-23.06	-10.41
5	12.80843	9.83	53.79	52.68	63.62	62.51	87.00	74.00	-23.38	-11.49
6	19.70927	9.96	52.54	49.76	62.50	59.72	87.00	74.00	-24.50	-14.28

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

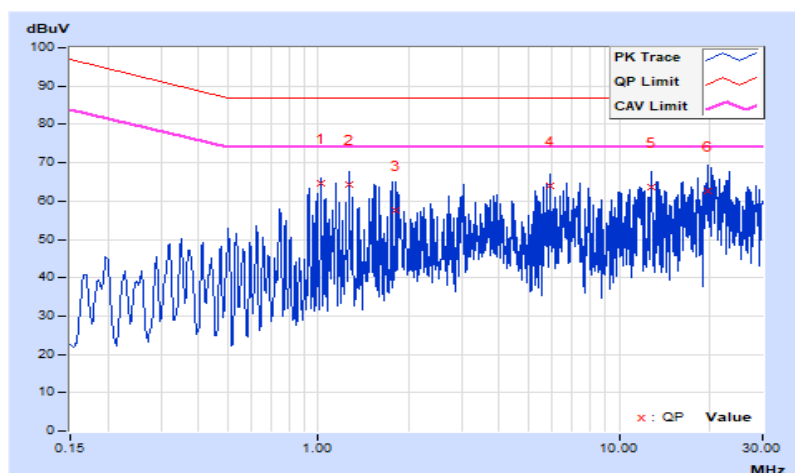



### 7.3 Radiated Emissions up to 1 GHz


#### Mode A

Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	24 Vdc	Environmental Conditions	32 °C, 77% RH, 1000 mbar
Tested By	Paul Chen		

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.00	34.49 QP	40.00	-5.51	4.00 H	33	49.01	-14.52
2	120.50	26.71 QP	40.00	-13.29	4.00 H	94	36.05	-9.34
3	131.94	27.33 QP	40.00	-12.67	4.00 H	176	36.59	-9.26
4	151.52	27.19 QP	40.00	-12.81	4.00 H	154	36.88	-9.69
5	174.96	35.01 QP	40.00	-4.99	4.00 H	356	46.12	-11.11
6	225.00	35.55 QP	40.00	-4.45	4.00 H	360	45.56	-10.01
7	250.00	40.07 QP	47.00	-6.93	3.78 H	105	47.21	-7.14
8	400.00	43.81 QP	47.00	-3.19	2.76 H	197	47.51	-3.70
9	500.01	38.62 QP	47.00	-8.38	1.92 H	200	40.70	-2.08
10	624.98	36.57 QP	47.00	-10.43	1.55 H	227	35.61	0.96
11	874.99	41.39 QP	47.00	-5.61	1.00 H	187	36.87	4.52
12	999.99	36.59 QP	47.00	-10.41	1.00 H	272	29.24	7.35

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

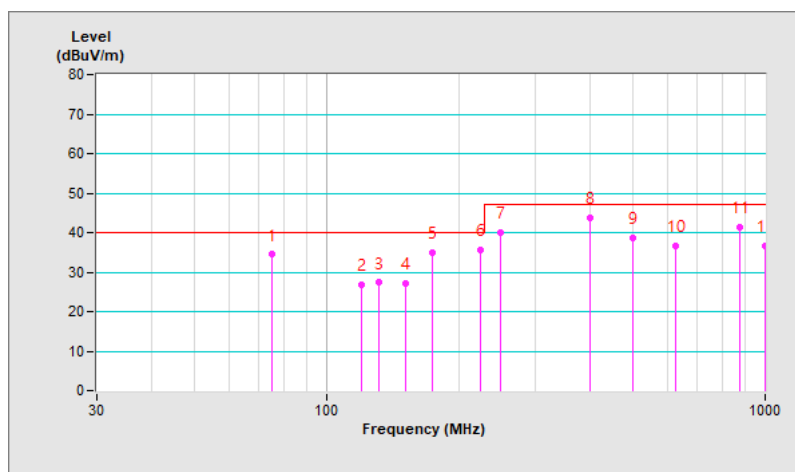


Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	24 Vdc	Environmental Conditions	32 °C, 77% RH, 1000 mbar
Tested By	Paul Chen		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.00	37.45 QP	40.00	-2.55	1.69 V	300	51.97	-14.52
2	125.18	37.37 QP	40.00	-2.63	1.00 V	283	46.47	-9.10
3	147.92	30.18 QP	40.00	-9.82	1.00 V	231	39.75	-9.57
4	175.00	39.60 QP	40.00	-0.40	1.00 V	360	50.71	-11.11
5	218.02	38.34 QP	40.00	-1.66	1.00 V	294	49.01	-10.67
6	225.00	35.53 QP	40.00	-4.47	1.00 V	236	45.54	-10.01
7	250.06	36.46 QP	47.00	-10.54	1.00 V	360	43.59	-7.13
8	400.00	43.77 QP	47.00	-3.23	1.00 V	279	47.47	-3.70
9	500.00	38.87 QP	47.00	-8.13	1.00 V	360	40.95	-2.08
10	625.20	37.79 QP	47.00	-9.21	3.21 V	1	36.83	0.96
11	874.99	39.01 QP	47.00	-7.99	2.65 V	199	34.49	4.52
12	999.99	34.73 QP	47.00	-12.27	2.16 V	289	27.38	7.35

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

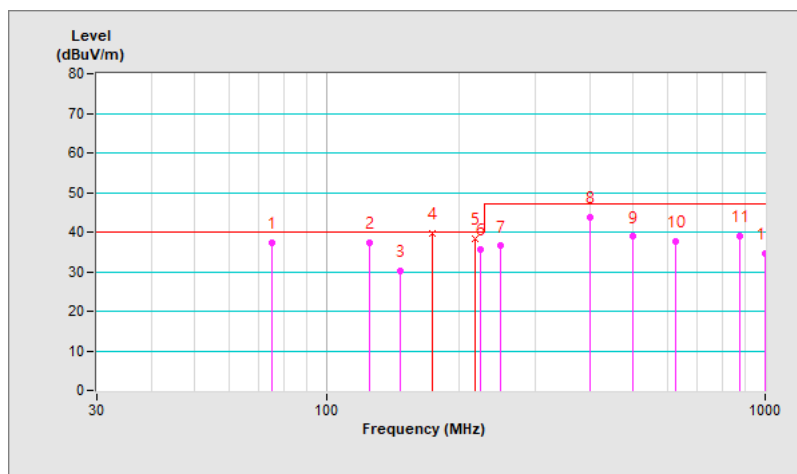

## 7.4 Radiated Emissions above 1 GHz


### Mode A

Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1 MHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 62% RH, 994.1 mbar
Tested By	Perry Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1052.67	44.14 PK	76.00	-31.86	2.13 H	122	68.31	-24.17
2	1052.67	27.00 AV	56.00	-29.00	2.13 H	122	51.17	-24.17
3	1766.75	45.93 PK	76.00	-30.07	1.10 H	348	67.18	-21.25
4	1766.75	34.55 AV	56.00	-21.45	1.10 H	348	55.80	-21.25
5	2018.94	46.57 PK	76.00	-29.43	1.00 H	355	66.59	-20.02
6	2018.94	35.87 AV	56.00	-20.13	1.00 H	355	55.89	-20.02
7	2271.09	46.18 PK	76.00	-29.82	1.00 H	232	65.77	-19.59
8	2271.09	34.86 AV	56.00	-21.14	1.00 H	232	54.45	-19.59
9	3303.67	46.00 PK	80.00	-34.00	2.92 H	276	61.60	-15.60
10	3303.67	31.23 AV	60.00	-28.77	2.92 H	276	46.83	-15.60
11	4135.33	47.75 PK	80.00	-32.25	1.00 H	304	61.58	-13.83
12	4135.33	33.51 AV	60.00	-26.49	1.00 H	304	47.34	-13.83

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

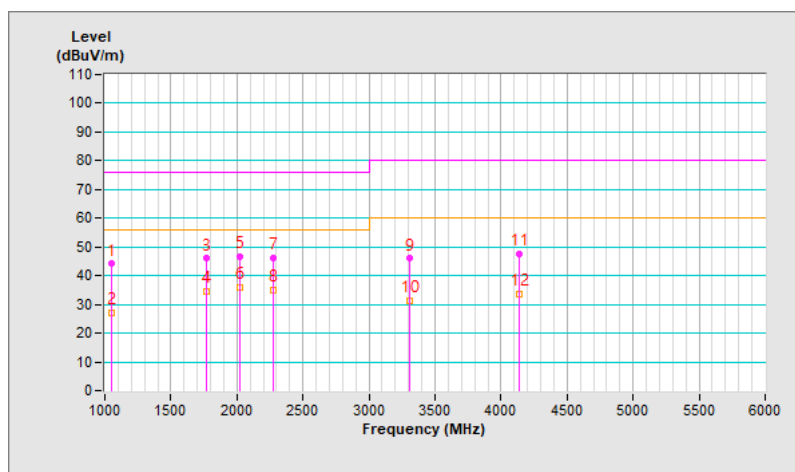


Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1 MHz
Input Power	24 Vdc	Environmental Conditions	24 °C, 62% RH, 994 mbar
Tested By	Perry Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1766.53	47.05 PK	76.00	-28.95	1.05 V	162	68.30	-21.25
2	1766.53	36.67 AV	56.00	-19.33	1.05 V	162	57.92	-21.25
3	1999.41	51.62 PK	76.00	-24.38	1.00 V	296	71.75	-20.13
4	1999.41	28.28 AV	56.00	-27.72	1.00 V	296	48.41	-20.13
5	2271.30	46.17 PK	76.00	-29.83	2.13 V	165	65.76	-19.59
6	2271.30	35.06 AV	56.00	-20.94	2.13 V	165	54.65	-19.59
7	2523.64	47.32 PK	76.00	-28.68	1.64 V	188	65.63	-18.31
8	2523.64	35.62 AV	56.00	-20.38	1.64 V	188	53.93	-18.31
9	2923.67	44.38 PK	76.00	-31.62	1.00 V	356	61.11	-16.73
10	2923.67	30.27 AV	56.00	-25.73	1.00 V	356	47.00	-16.73
11	5492.50	49.07 PK	80.00	-30.93	2.96 V	85	61.47	-12.40
12	5492.50	35.64 AV	60.00	-24.36	2.96 V	85	48.04	-12.40

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

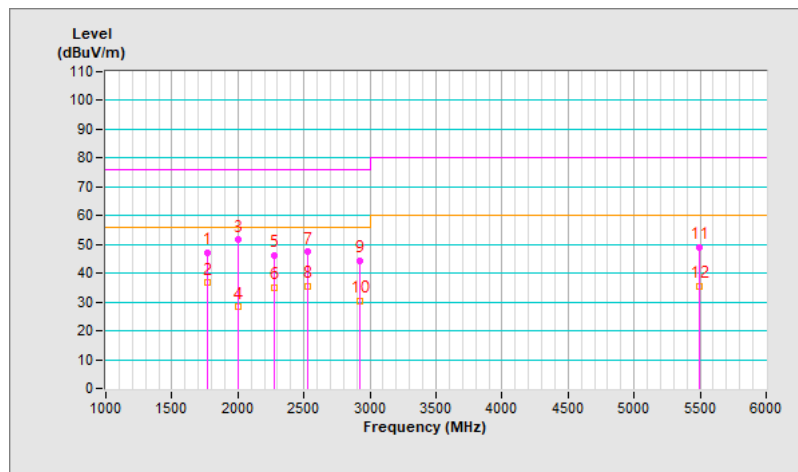

## 7.5 Electrostatic Discharges (ESD)

### Mode A

#### For EN 55035

Input Power	DC 24V	Environmental conditions	24 °C, 46 % RH 994 mbar
Tested by	Aga Lin		

Test Results of Direct Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criteria
2, 4	+/-	1, 2, 12 - 18, 23 - 40	Note 2	---	B
2	+/-	3 - 11, 19 - 22, 41 - 44	---	Note 1	A
4, 8	+/-	3 - 11, 19 - 22, 41 - 44	---	Note 2	B

Description of test points of direct application: Please refer to following page for representative mark only.

Test Results of Indirect Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criteria
2, 4	+/-	Four Side	Note 2	Note 2	B

Description of test points of indirect application:



1. Front side
2. Rear side
3. Right side
4. Left side

Please refer to the attached page for description of test points.



Notes:



1. The EUT is operated normal during the test.
2. The output monitor's image disappeared during the test, but it can be self-recoverable after the test.

## Description of test point

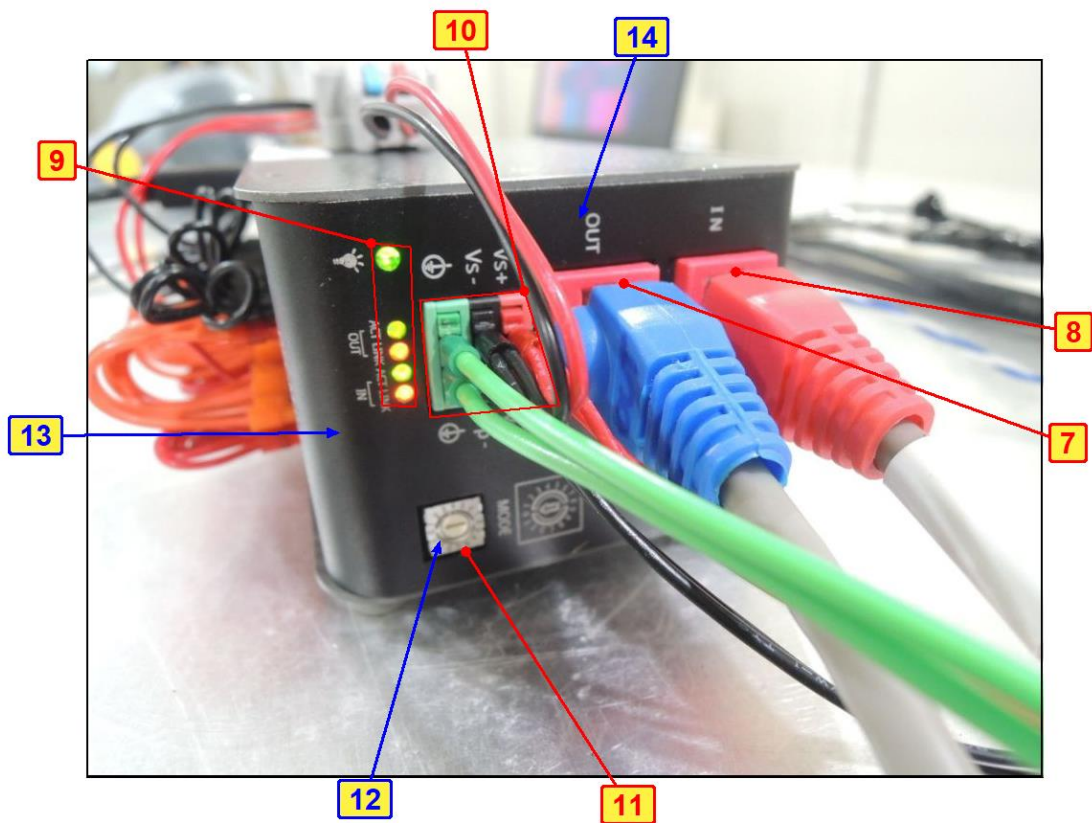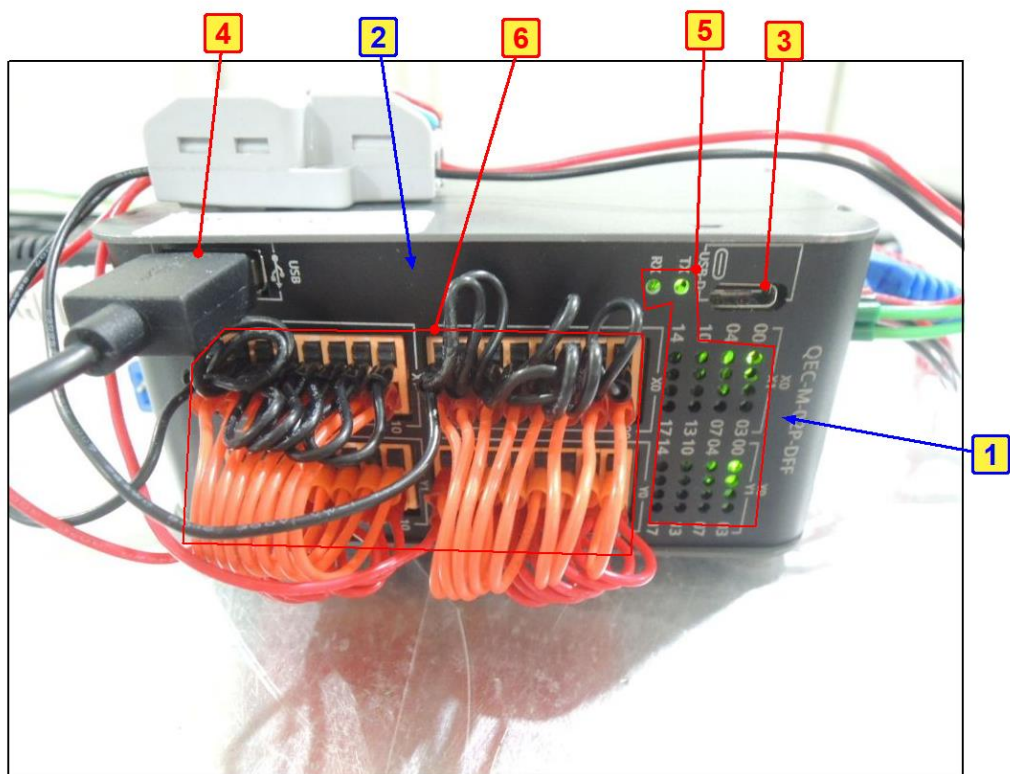



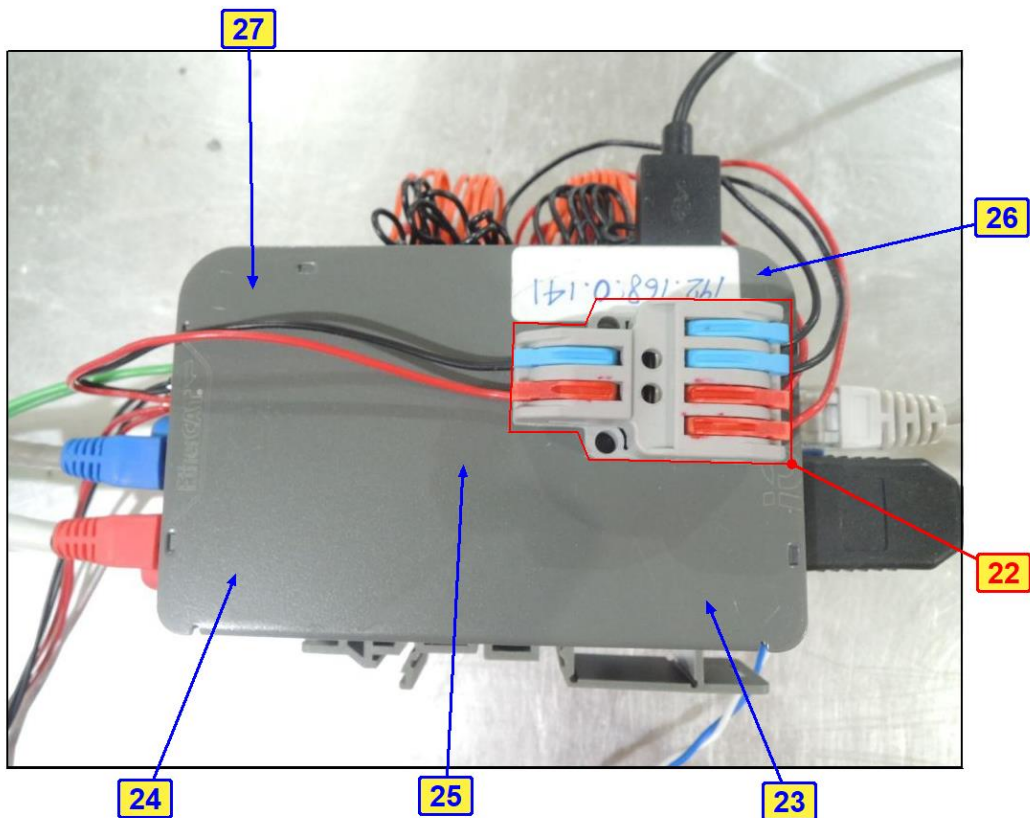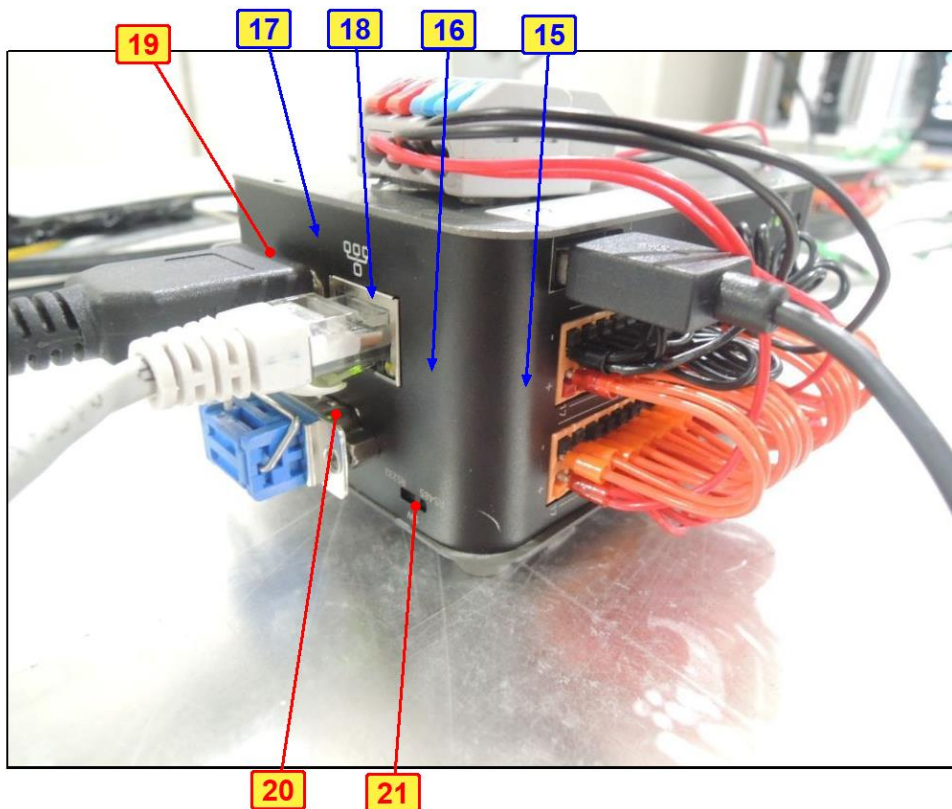

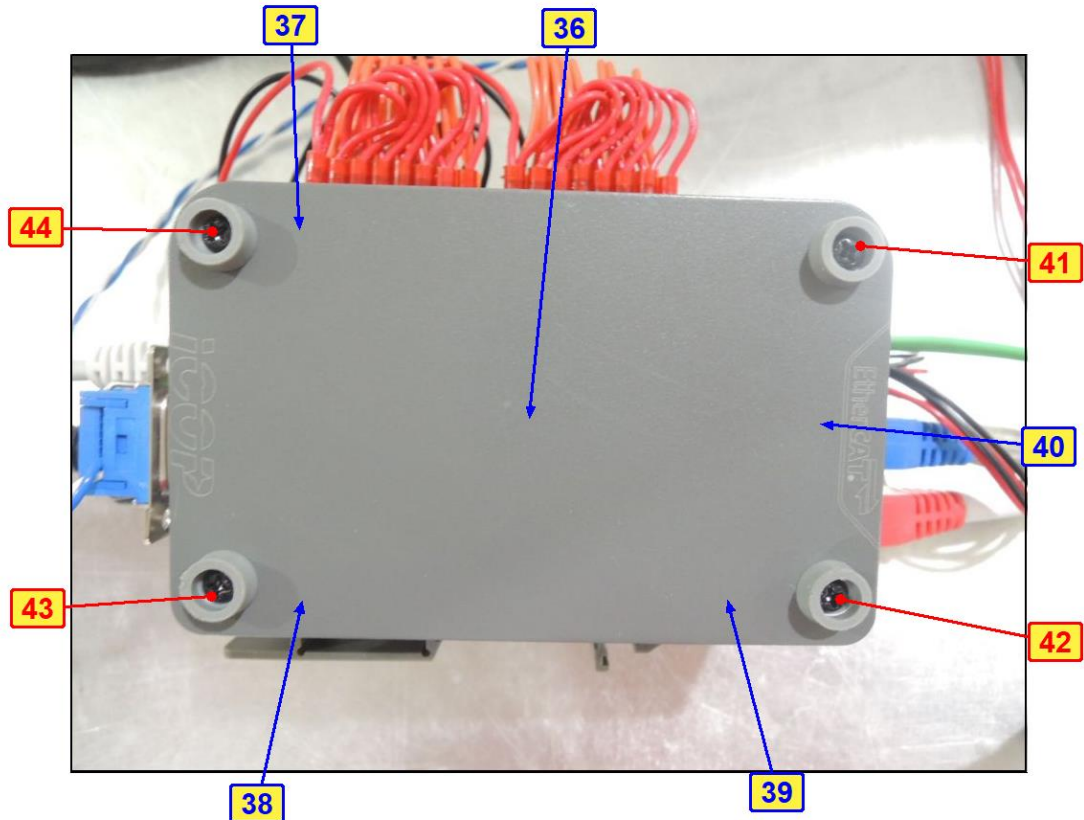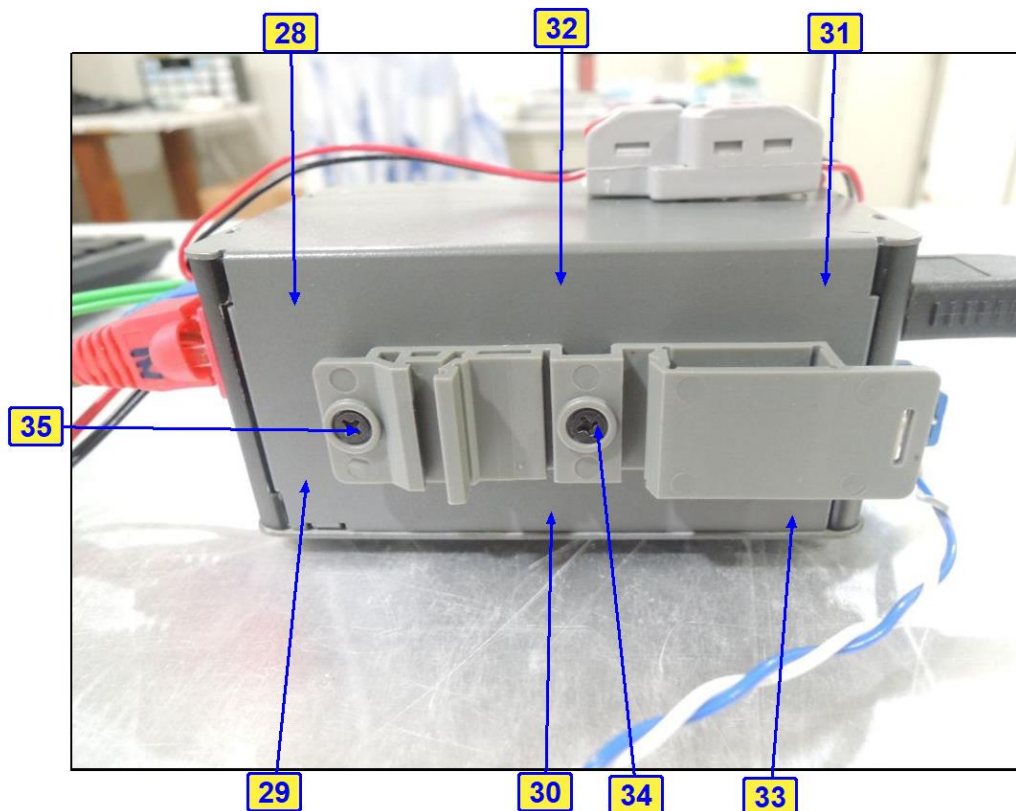



## 7.6 Radio Frequency Electromagnetic Field (RS)

### Mode A

#### For EN 55035

Input Power	DC 24V	Environmental conditions	26 °C, 62 % RH 996 mbar
Tested by	Aga Lin		

Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Observation	Performance Criteria
			(V/m)	Modulation		
80 - 1000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note	A
1800, 2600, 3500, 5000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note	A

Note: The EUT is operated normal during the test.

## 7.7 Fast Transients Common Mode (EFT)

### Mode A

#### For EN 55035

Input Power	AC 230V / 50Hz	Environmental conditions	24 °C, 65 % RH 996 mbar
Tested by	Xun Lee		

Input DC power port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
0.5	DC(+)	+/-	Note	B
0.5	DC(-)	+/-	Note	B
0.5	DC(+)-DC(-)	+/-	Note	B

Wired network and signal/ control port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
0.5	LAN	+/-	Note	B
0.5	EtherCAT IN	+/-	Note	B
0.5	EtherCAT OUT	+/-	Note	B

Note: The output monitor's image disappeared during the test, but it can be self-recoverable after the test.

## 7.8 Surges

### Mode A

#### For EN 55035

Input Power	DC 24V	Environmental conditions	24 °C, 72 % RH 996 mbar
Tested by	Xun Lee		

Input DC power port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
0.5	DC(+)-PE	+/-	Note	A
0.5	DC(-)-PE	+/-	Note	A

Note: The EUT is operated normal during the test.

## 7.9 Radio Frequency Common Mode (CS)

### Mode A

#### For EN 55035

Input Power	DC 24V	Environmental conditions	24 °C, 75 % RH 996 mbar
Tested by	Aga Lin		

Input DC power port							
Frequency (MHz)	Level (V rms)	Modulation	Tested Line	Injection Method	Return Path	Observation	Performance Criteria
0.15 - 10	3	80% AM (1kHz)	DC Power	CDN-M2	CDN-M1	Note	A
10 - 30	3~1	80% AM (1kHz)	DC Power	CDN-M2	CDN-M1	Note	A
30 - 80	1	80% AM (1kHz)	DC Power	CDN-M2	CDN-M1	Note	A

Wired network and signal/ control port							
Frequency (MHz)	Level (V rms)	Modulation	Tested Line	Injection Method	Return Path	Observation	Performance Criteria
0.15 - 10	3	80% AM (1kHz)	Giga LAN	CDN-T8-230	CDN-M1	Note	A
10 - 30	3~1	80% AM (1kHz)	Giga LAN	CDN-T8-230	CDN-M1	Note	A
30 - 80	1	80% AM (1kHz)	Giga LAN	CDN-T8-230	CDN-M1	Note	A
0.15 - 10	3	80% AM (1kHz)	EtherCAT OUT	CDN-T8-230	CDN-M1	Note	A
10 - 30	3~1	80% AM (1kHz)	EtherCAT OUT	CDN-T8-230	CDN-M1	Note	A
30 - 80	1	80% AM (1kHz)	EtherCAT OUT	CDN-T8-230	CDN-M1	Note	A
0.15 - 10	3	80% AM (1kHz)	EtherCAT IN	CDN-T8-230	CDN-M1	Note	A
10 - 30	3~1	80% AM (1kHz)	EtherCAT IN	CDN-T8-230	CDN-M1	Note	A
30 - 80	1	80% AM (1kHz)	EtherCAT IN	CDN-T8-230	CDN-M1	Note	A

Note: The EUT is operated normal during the test.

## 7.10 Power Frequency Magnetic Field (PFMF)

### Mode A

#### For EN 55035

Input Power	DC 24V	Environmental conditions	24 °C, 71 % RH 996 mbar
Tested by	Aga Lin		

Application	Frequency (Hz)	Field Strength (A/m)	Observation	Performance Criteria
X - Axis	50	1	Note	A
Y - Axis	50	1	Note	A
Z - Axis	50	1	Note	A

Note: The EUT is operated normal during the test.

## 8 Pictures of Test Arrangements

### 8.1 Conducted Emissions from Power Ports

#### Mode A



## 8.2 Conducted Emissions from Wired Network Ports

### Mode A





Mode B





Mode C






### 8.3 Radiated Emissions up to 1 GHz

#### Mode A

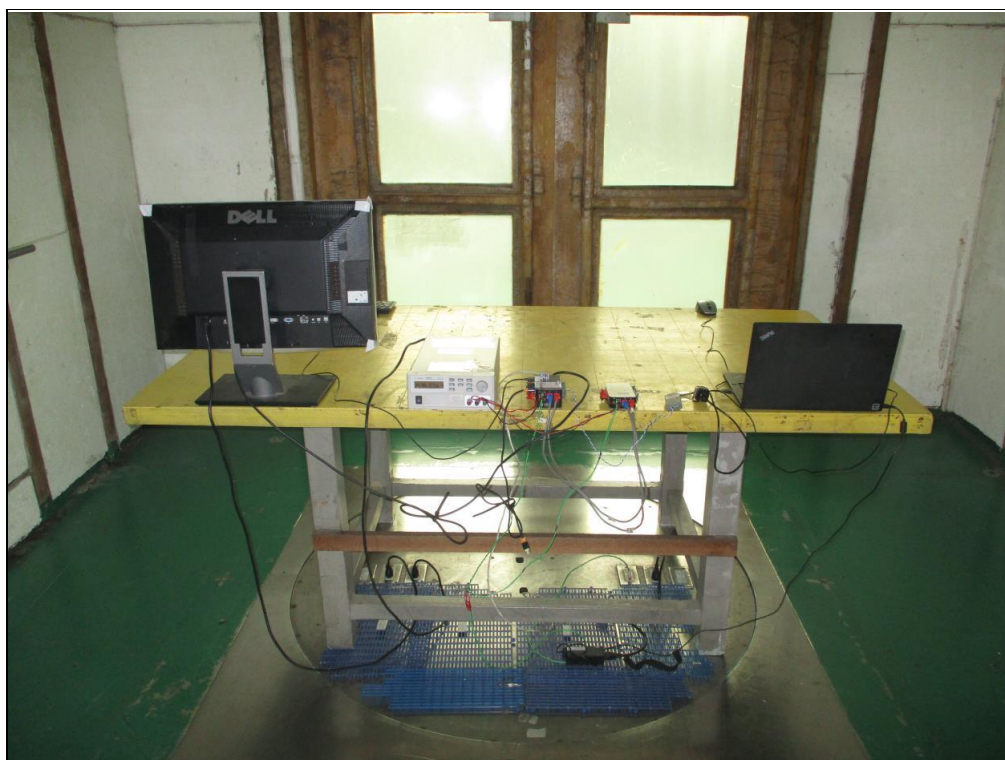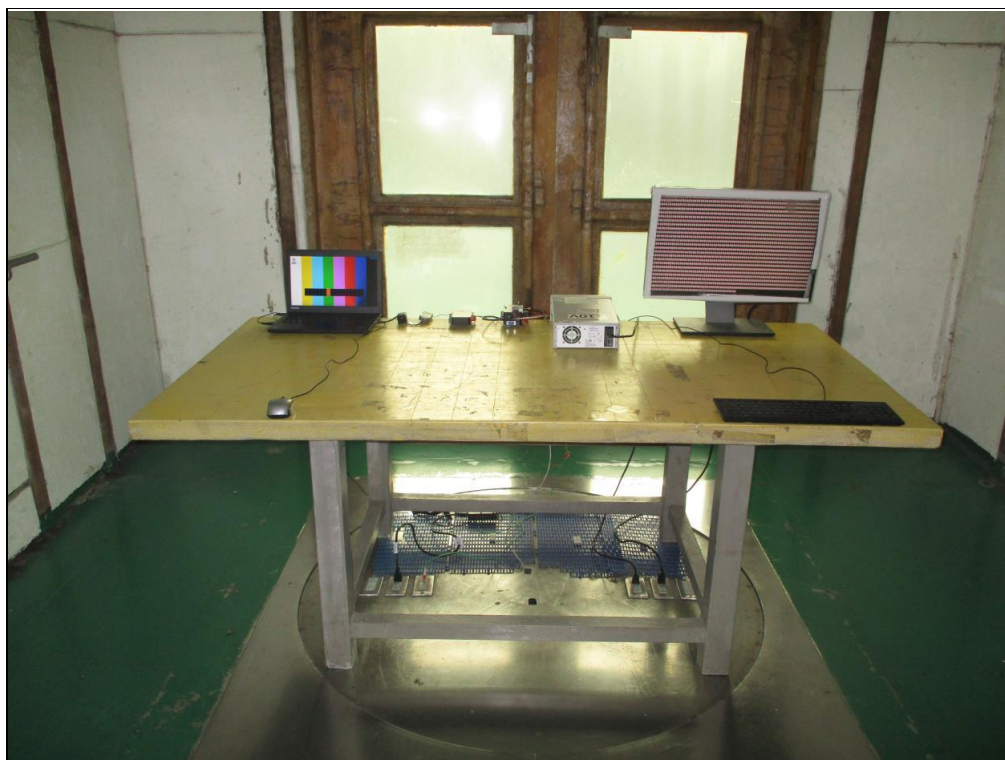

## 8.4 Radiated Emissions above 1 GHz


### Mode A

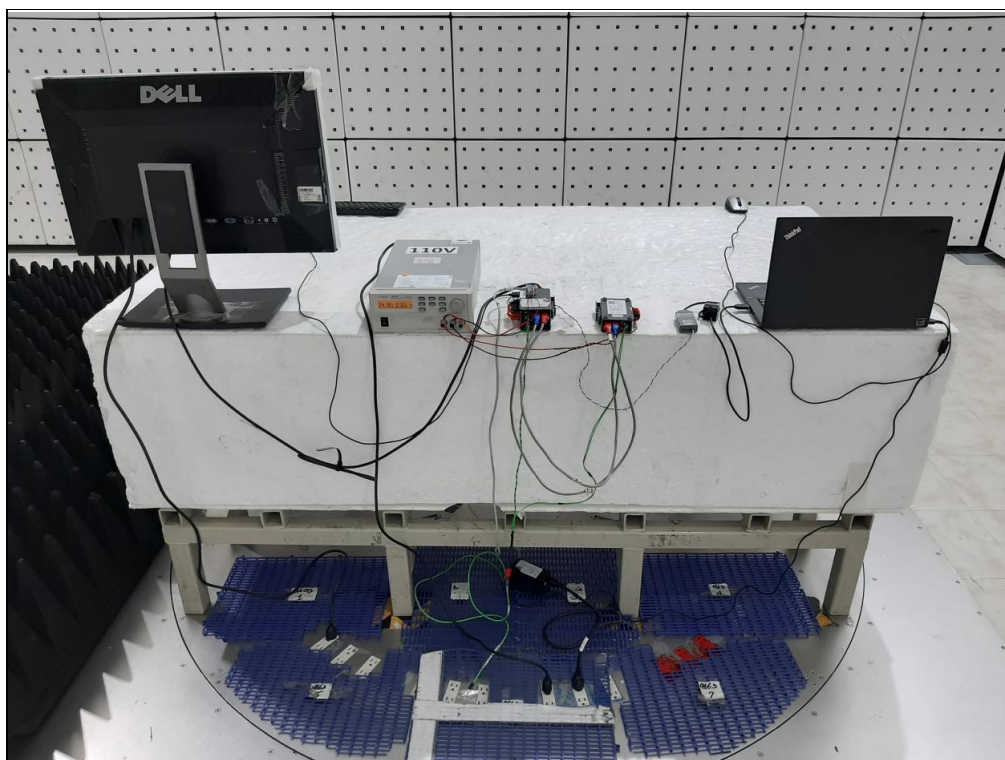




## 8.5 Electrostatic Discharges (ESD)

### Mode A

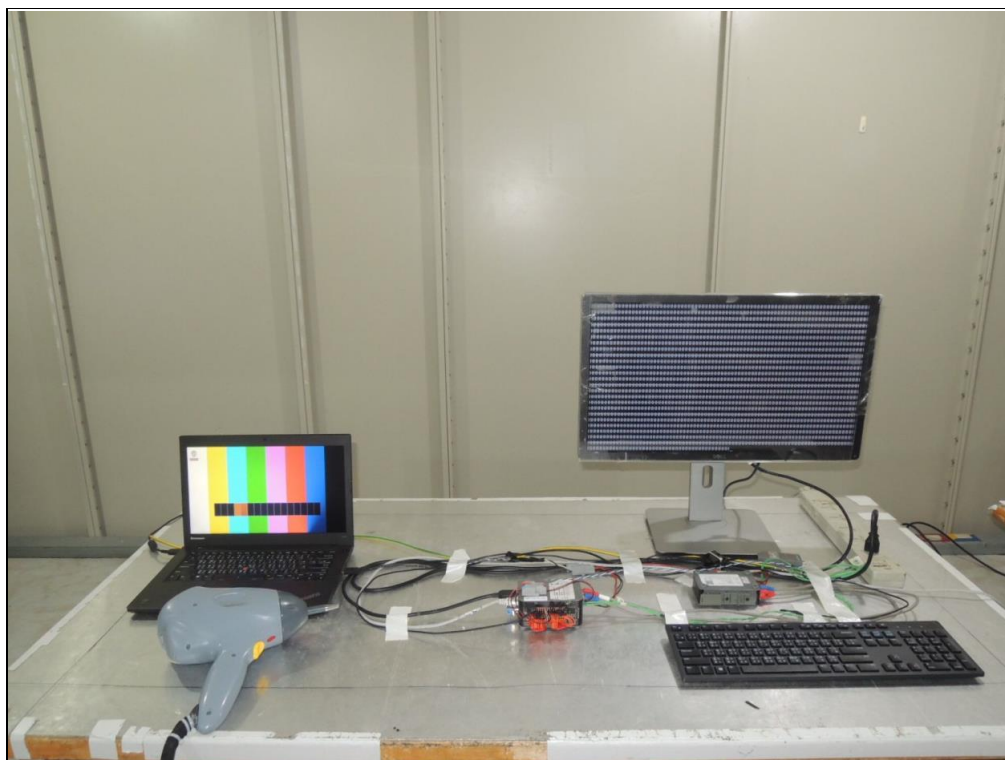

## 8.6 Radio Frequency Electromagnetic Field (RS)


### Mode A

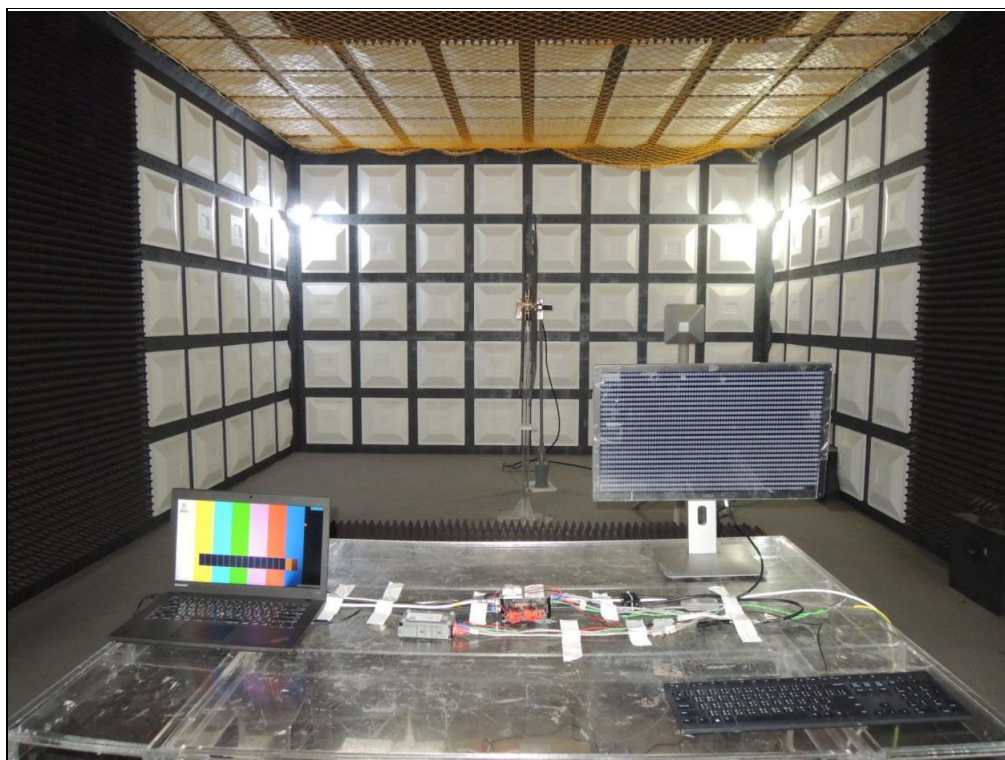



## 8.7 Fast Transients Common Mode (EFT)

### Mode A

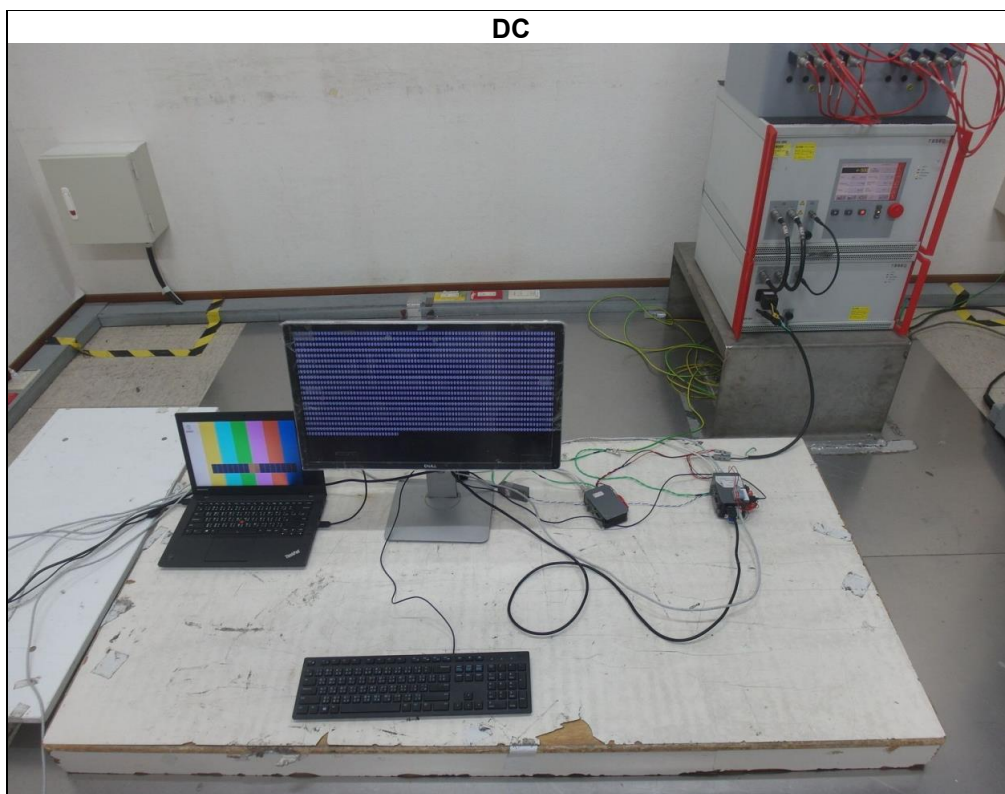

### ETHERCAT OUT



### LAN



## 8.8 Surges


### Mode A






## 8.9 Radio Frequency Common Mode (CS)


### Mode A

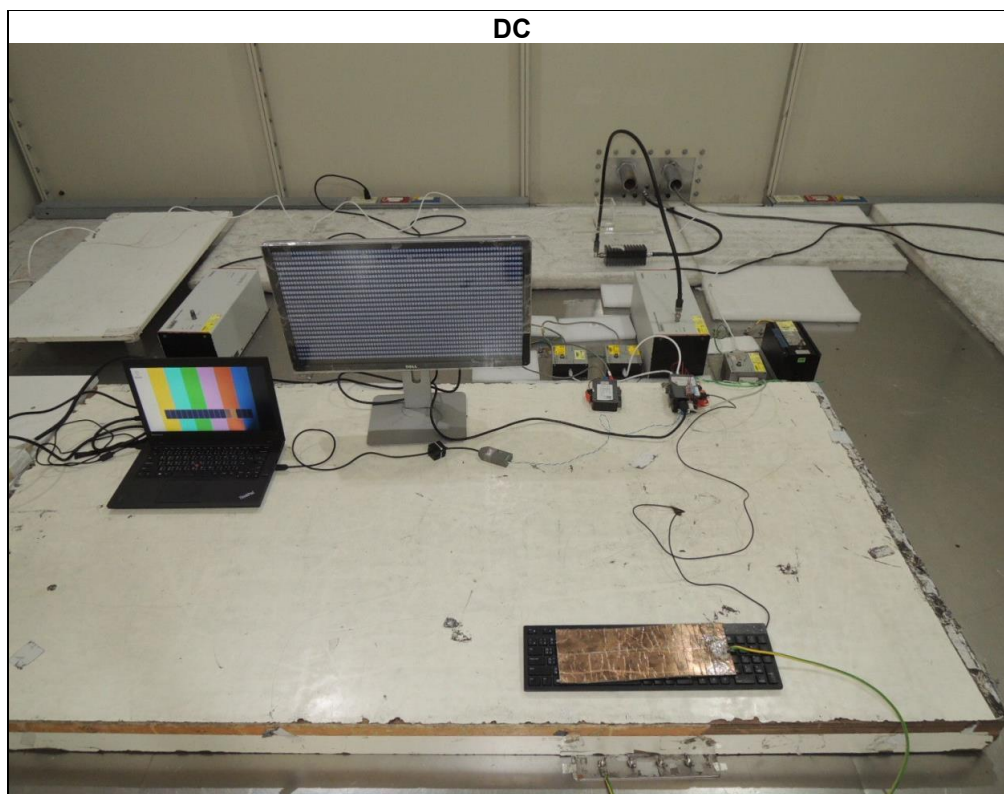

ETHERCAT OUT

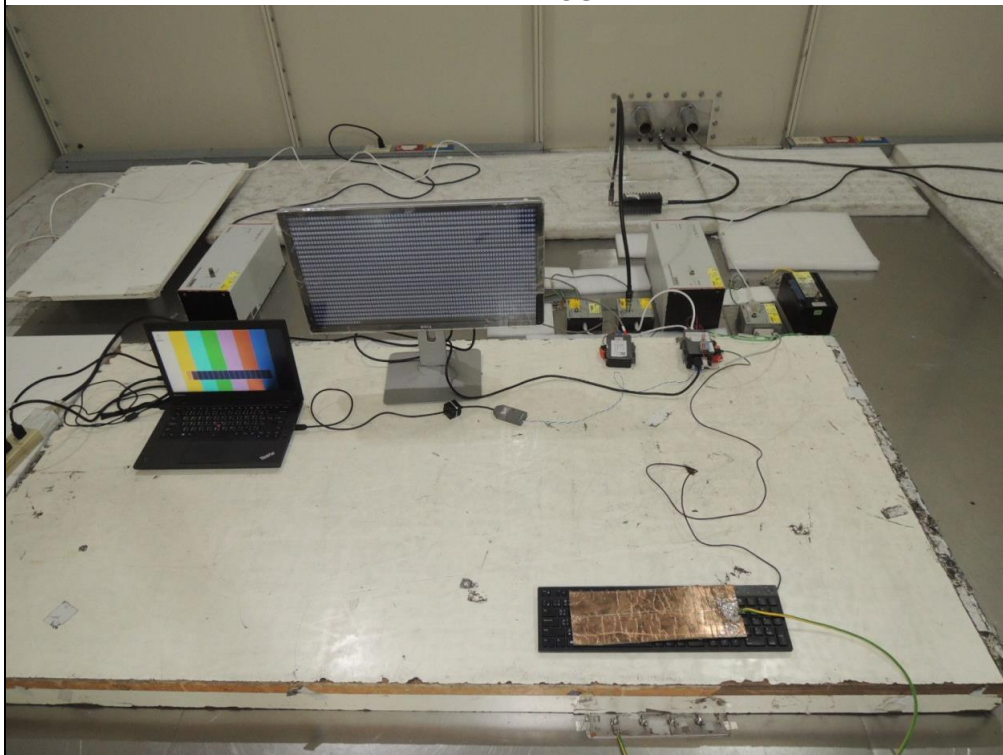

LAN

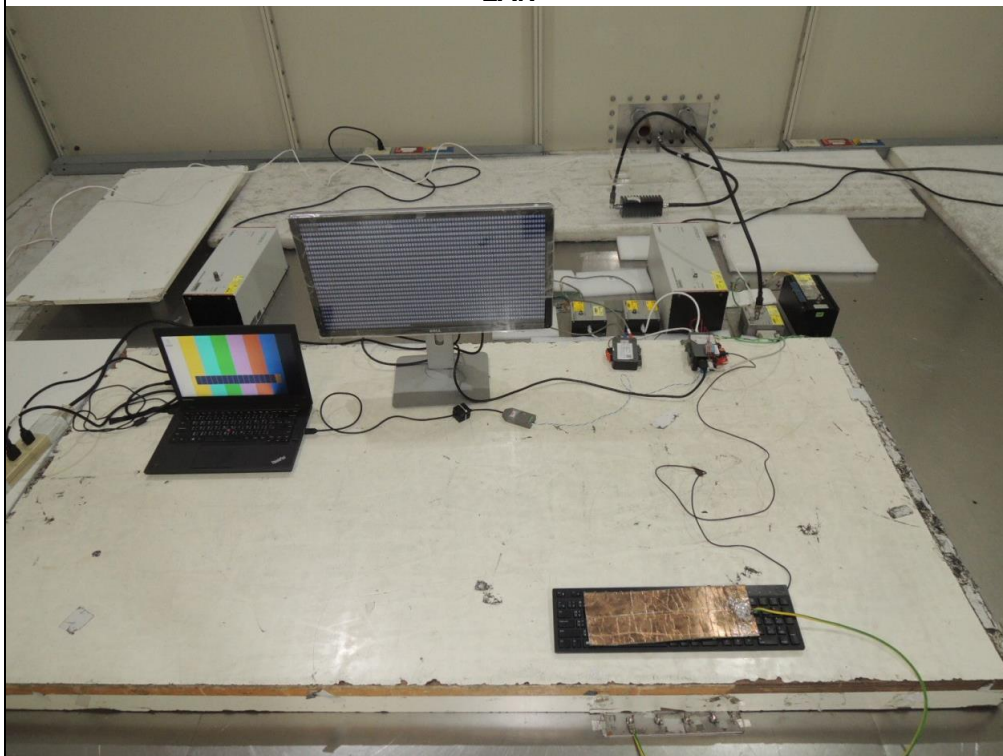

## 8.10 Power Frequency Magnetic Field (PFMF)

### Mode A





## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---