


TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: VCCI-CISPR 32: 2016, Class A
Report No.: VBDBO-WTW-P24020289
Product: QEC
Brand: ICOP
Model No.: R
Series Model: QEC-RXXDT0X-N (X=0~9, A~Z, (,),/, - or Blank)
Received Date: 2024/2/21
Test Date: 2024/2/27 ~ 2024/2/28
Issued Date: 2024/3/26
Applicant: ICOP TECHNOLOGY INC.
Address: NO.15,Wugong 5th Rd., Xinzhuang Dist., New Taipei City 24890, Taiwan (R.O.C.)
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab. VCCI Member No: 395
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Approved by:


Jim Hsiang / Associate Technical Manager

, Date: 2024/3/26

This test report consists of 28 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Annie Chang / Senior Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 Description of EUT	6
3.2 Primary Clock Frequencies of Internal Source.....	6
3.3 Features of EUT	6
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode	6
3.5 Test Program Used and Operation Descriptions	7
3.6 Connection Diagram of EUT and Peripheral Devices	7
3.7 Configuration of Peripheral Devices and Cable Connections	8
4 Test Instruments	9
4.1 Conducted Emissions from Power Ports	9
4.2 Conducted Emissions from Wired Network Ports	10
4.3 Radiated Emissions up to 1 GHz	11
5 Limits of Test Items.....	12
5.1 Conducted Emissions from Power Ports	12
5.2 Conducted Emissions from Wired Network Ports	12
5.3 Radiated Emissions up to 1 GHz	12
6 Test Arrangements.....	13
6.1 Conducted Emissions from Power Ports	13
6.2 Conducted Emissions from Wired Network Ports	14
6.3 Radiated Emissions up to 1 GHz	17
7 Test Results of Test Item	18
7.1 Conducted Emissions from Power Ports	18
7.2 Conducted Emissions from Wired Network Ports	20
7.3 Radiated Emissions up to 1 GHz	22
8 Pictures of Test Arrangements	24
8.1 Conducted Emissions from Power Ports	24
8.2 Conducted Emissions from Wired Network Ports	25
8.3 Radiated Emissions up to 1 GHz	27
9 Information of the Testing Laboratories	28

Release Control Record

Issue No.	Description	Date Issued
VBDBO-WTW-P24020289	Original release.	2024/3/26

1 Certificate

Product: QEC

Brand: iCOP

Test Model: R

Series Model: QEC-RXXDT0X-N (X=0~9, A~Z, (,),/, - or Blank)

Sample Status: Engineering sample

Applicant: ICOP TECHNOLOGY INC.

Test Date: 2024/2/27 ~ 2024/2/28

Standard: VCCI-CISPR 32: 2016, Class A

Measurement procedure: CISPR 32: 2015 (Edition 2.0)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions, are as follows:

Standard	Test Item	Result	Remark
VCCI-CISPR 32	Conducted Emissions from Power Ports	Pass	Minimum passing Class A margin is -2.73 dB at 0.28815 MHz
VCCI-CISPR 32	Conducted Emissions from Wired Network Ports	Pass	Minimum passing Class A margin is -4.50 dB at 0.34290 MHz
VCCI-CISPR 32	Radiated Emissions up to 1 GHz	Pass	Minimum passing Class A margin is -2.37 dB at 125.00 MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Conducted Emissions from Power Ports	9 kHz ~ 30 MHz	2.90 dB	3.4 dB (U_{CISPR})
Conducted Emissions from Wired Network Ports	150 kHz ~ 30 MHz	ISN Cat3 : 3.38 dB ISN Cat5 : 3.86 dB ISN Cat6 : 4.36 dB Current Probe : 1.56 dB Voltage Probe : 2.90 dB Coaxial : 2.34 dB	5.0 dB (U_{CISPR}) using AAN 2.9 dB (U_{CISPR}) using CP 3.9 dB (U_{CISPR}) using CVP
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	3m: 5.46 dB 10m: 4.04 dB	6.3 dB (U_{CISPR})

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 Description of EUT

Product	QEC
Brand	iCOP
Test Model	R
Series Model	QEC-RXXDT0X-N (X=0~9, A~Z, (,),/, - or Blank)
Model Difference	Marketing Differentiation
Sample Status	Engineering sample
Power Supply Rating	DC 24V, 0.2A

3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 24 MHz, provided by ICOP TECHNOLOGY INC., for detailed internal source, please refer to the manufacturer's specifications.

3.3 Features of EUT

The tests reported herein were performed according to the method specified by ICOP TECHNOLOGY INC., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.

3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT has been pre-tested under following test modes.

Test Condition	
Mode	Radiated Emissions up to 1 GHz
1	operating mode, Lan link + Input Power(24 Vdc)
Note: There are both standby mode and normal mode to be pre-tested then normal mode has the highest emission value.	


Test modes are presented in the report as below.

Test Condition	
Mode	Conducted Emissions from Power Ports
A	operating mode, Lan link + Input Power(24 Vdc)
Mode	Conducted Emissions from Wired Network Ports
A	operating mode, Lan link + For Lan In link test + Input Power(24 Vdc)
B	operating mode, Lan link + For Lan Out link test + Input Power(24 Vdc)
Note: The idle mode of conducted emission test at wired network ports test was pre-tested based on the worst case of link mode. Due to emissions of idle mode being very low compared to link mode, only the link mode data were presented in the test report.	
Mode	Radiated Emissions up to 1 GHz
A	operating mode, Lan link + Input Power(24 Vdc)

3.5 Test Program Used and Operation Descriptions

- Turned on the power of all equipment.
- Laptop sent and received message to/ from EUT via RS485 driver.
- Laptop (kept at remote site) sent and received message to/ from EUT via RJ45 cable.
- Laptop sent (ITU-R BT 471-1) messages to panel. Then they displayed messages on their screens simultaneously.
- Laptop sent messages to printer and printed them out.

3.6 Connection Diagram of EUT and Peripheral Devices

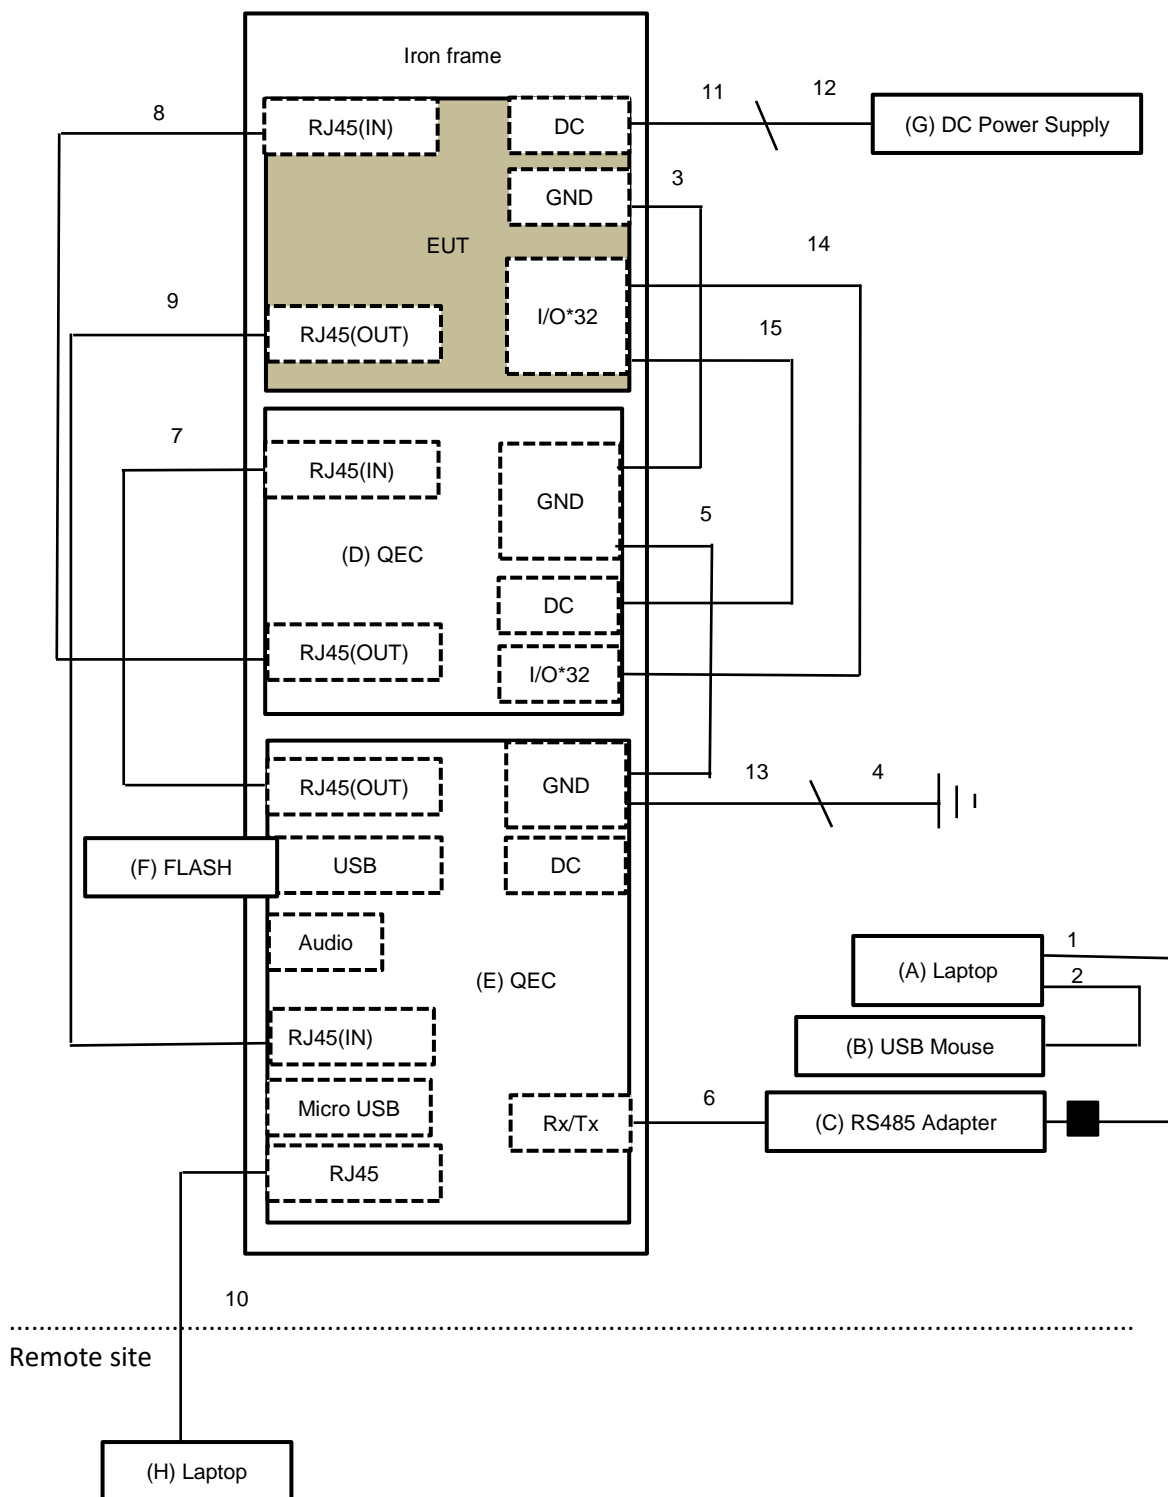

3.7 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	TP00050A	N/A	N/A	Supplied by applicant
B	USB Mouse	DELL	MOCZUL	CN-049TWY- PRC00-77B-007R	N/A	Provided by Lab
C	RS485 Adapter	SOYAL	AR-321CM	N/A	N/A	Supplied by applicant
D	QEC	QEC	QEC-R11D0TH-N	N/A	N/A	Supplied by applicant
E	QEC	QEC	QEC-M-01	N/A	N/A	Supplied by applicant
F	FLASH	HP	V222W	N/A	N/A	Supplied by applicant
G	DC Power Supply	HILA	DP-6010	2216AP041904059	N/A	Provided by Lab
H	Laptop	LENOVO	T480	PF1EK03U	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB	1	0.9	Y	1	Supplied by applicant
2	USB	1	1.8	Y	0	Provided by Lab
3	GND (PE)	1	0.1	N	0	Supplied by applicant
4	GND (PE)	1	1.5	N	0	Provided by Lab
5	GND (PE)	1	0.1	N	0	Supplied by applicant
6	Data	1	0.5	N	0	Supplied by applicant
7	Cat. 5e	1	0.1	N	0	Supplied by applicant
8	Cat. 5e	1	0.2	N	0	Supplied by applicant
9	Cat. 5e	1	0.1	N	0	Supplied by applicant
10	Cat. 5e	1	10	N	0	Provided by Lab
11	Power	1	0.1	N	0	Supplied by applicant
12	Power	1	1	N	0	Provided by Lab
13	GND (PE)	1	0.1	N	0	Supplied by applicant
14	I/O	32	0.1	N	0	Supplied by applicant
15	Power	1	0.1	N	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Conducted Emissions from Power Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011285	2023/9/21	2024/9/20
		E1-011286	2023/9/21	2024/9/20
50 ohm terminal resistance SUHNER	65BNC-5001	E1-010789	2023/6/16	2024/6/15
EMI Test Receiver R&S	ESCI	100412	2023/8/23	2024/8/22
	ESCS 30	100276	2023/4/20	2024/4/19
Fixed Attenuator STI	STI02-2200-10	NO.1	2023/9/13	2024/9/12
LISN R&S	ENV216	101196	2023/5/22	2024/5/21
		101197	2023/7/12	2024/7/11
LISN Schwarzbeck	NNLK 8121	8121-731	2023/6/9	2024/6/8
		8121-00759	2023/8/21	2024/8/20
		8121-808	2023/5/2	2024/5/1
	NNLK 8129	8129229	2023/6/27	2024/6/26
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2024/2/7	2025/2/6
Software BVADT	Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10.
2. The VCCI Site Registration No. C-11852.
3. Tested Date: 2024/2/28

4.2 Conducted Emissions from Wired Network Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance SUHNER	65BNC-5001	E1-010789	2023/6/16	2024/6/15
Capacitive Voltage Probe FCC	F-CVP-1	82	2023/8/24	2024/8/23
EMI Test Receiver R&S	ESCI	100412	2023/8/23	2024/8/22
	ESCS 30	100276	2023/4/20	2024/4/19
Impedance Stabilization Network FCC	F-071115-1057-1	20651	2023/3/15	2024/3/14
		20652	2024/1/4	2025/1/3
Impedance Stabilization Network TESEQ	ISN S751	40599	2023/8/18	2024/8/17
	ISN ST08	41212	2023/8/31	2024/8/30
	ISN T8-Cat.6	53159	2023/3/22	2024/3/21
LISN R&S	ENV216	101196	2023/5/22	2024/5/21
		101197	2023/7/12	2024/7/11
LISN Schwarzbeck	NNLK 8121	8121-808	2023/5/2	2024/5/1
Matching Pad EMCI	EMCI-3PDSM75BF	N/A	2023/12/13	2024/12/12
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2024/2/7	2025/2/6
RF Current Probe FCC	F-33-4	56	2023/8/2	2024/8/1
Software BVADT	ISN_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10(ISN 10).
2. The VCCI Site Registration No. T-11611.
3. Tested Date: 2024/2/28

4.3 Radiated Emissions up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-316	2023/12/15	2024/12/14
		9168-317	2023/12/15	2024/12/14
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2023/5/25	2024/5/24
	CDNE-M3	00091	2023/5/25	2024/5/24
EMI Test Receiver R&S	ESR3	102983	2023/5/18	2024/5/17
		102984	2023/6/15	2024/6/14
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-CH8-01	2023/9/22	2024/9/21
		PAD-CH8-02	2023/9/22	2024/9/21
Preamplifier EMCI	EMC9135	980326	2024/2/15	2025/2/14
		980327	2024/2/15	2025/2/14
RF Coaxial Cable JYEBAO	LMR-600	Cable-CH8-01	2023/9/22	2024/9/21
		Cable-CH8-02	2023/9/22	2024/9/21
RF Coaxial Cable Pacific	8D-FB	Cable-CH8-03	2023/9/22	2024/9/21
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower Max Full.	MF7802	MF780208105	N/A	N/A
Turn Table & Tower Max Full.	MF7802	MF7802121	N/A	N/A

Notes:

1. The test was performed in Linkou 10M Chamber (Chamber 8) , The test site validated date: 2023/8/26 (NSA)
2. The VCCI Site Registration No. R-12946.
3. Tested Date: 2024/2/27

5 Limits of Test Items

5.1 Conducted Emissions from Power Ports

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Conducted Emissions from Wired Network Ports

Frequency (MHz)	Coupling Device	Class A				Class B			
		Voltage Limit (dBuV)		Current limits (dBA)		Voltage Limit (dBuV)		Current limits (dBA)	
		Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	Using AAN	97-87	84-74	-	-	84-74	74-64	-	-
0.5-30		87	74	-	-	74	64	-	-
0.15-0.5	Using CVP and Current probe	97-87	84-74	53-43	40-30	84-74	74-64	40-30	30-20
0.5-30		87	74	43	30	74	64	30	20
0.15-0.5	Current probe	-	-	53-43	40-30	-	-	40-30	30-20
0.5-30		-	-	43	30	-	-	30	20

Note: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

5.3 Radiated Emissions up to 1 GHz

Frequency (MHz)	Class A Quasi-peak (dBuV/m)		Class B Quasi-peak (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	50	40	40	30
230 - 1000	57	47	47	37

For radiated emissions from FM receivers only (Measurement Facility: OATS/SAC)

Frequency (MHz)	Fundamental (dBuV/m)		Harmonics (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	60	50	52	42
230 - 300	60	50	52	42
300 - 1000	60	50	56	46

Notes: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

6.2 Conducted Emissions from Wired Network Ports

Method of Using AANs:

- The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AAN directly to reference ground plane.
- If voltage measurement is used, measure voltage at the measurement port of the AAN, correct the reading by adding the AAN voltage division factor, and compare to the voltage limit.
- It is not necessary to apply the current limit if a AAN is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

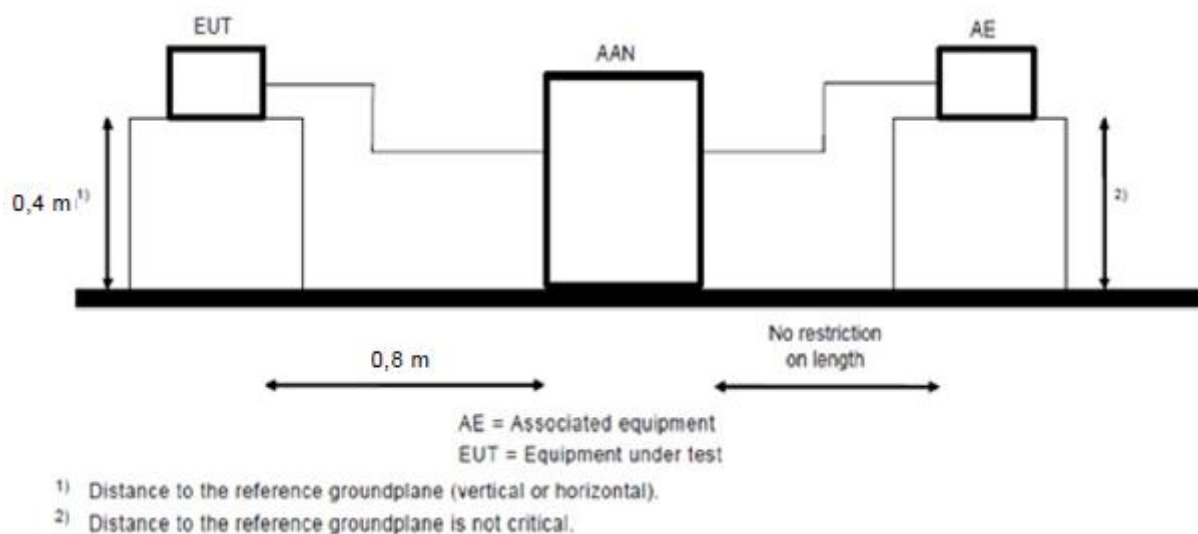


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

Method of Using a combination of Current Probe and 150 Ω load to the outside surface of the shielding cable:

- Breaks the external protective insulation (exposing the shield) and connect a 150 Ω resistor from the outside surface of the shield to ground.
- A current probe shall be placed at 0.1 m from the 150 Ω resistor. The current probe to EUT horizontal distance is between 0.3 m to 0.8 m.
- If current measurement is used, measure current at the measurement port of the current probe, correct the reading by adding the current probe division factor, and compare to the current limit.
- It is not necessary to apply the voltage limit if a current probe is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

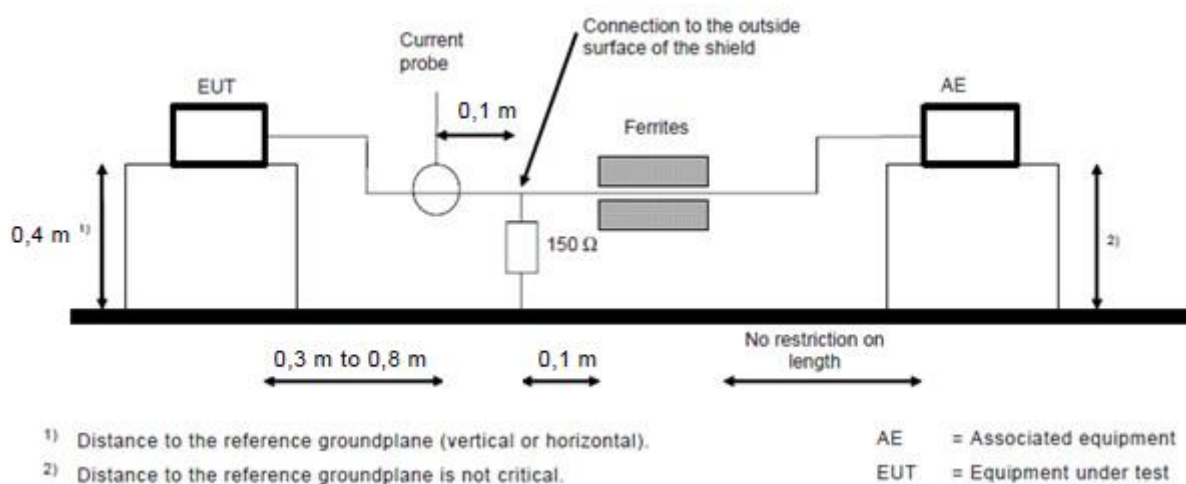


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

Method of Using a combination of current probe and capacitive voltage probe:

- a. Measure current with a current probe.
- b. Compare the measured current with the applicable current limit.
- c. Measure voltage with a capacitive voltage probe as specified in 5.2.2 of CISPR 16-1-2.
- d. Adjust the measured voltage as follows:
 - current margin ≤ 6 dB – subtract the actual current margin from measured voltage;
 - current margin > 6 dB – subtract 6 dB from measured voltage.
- e. Compare adjusted voltage with the applicable voltage limit
- f. Both the measured current and the adjusted voltage shall be below the applicable
- g. The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

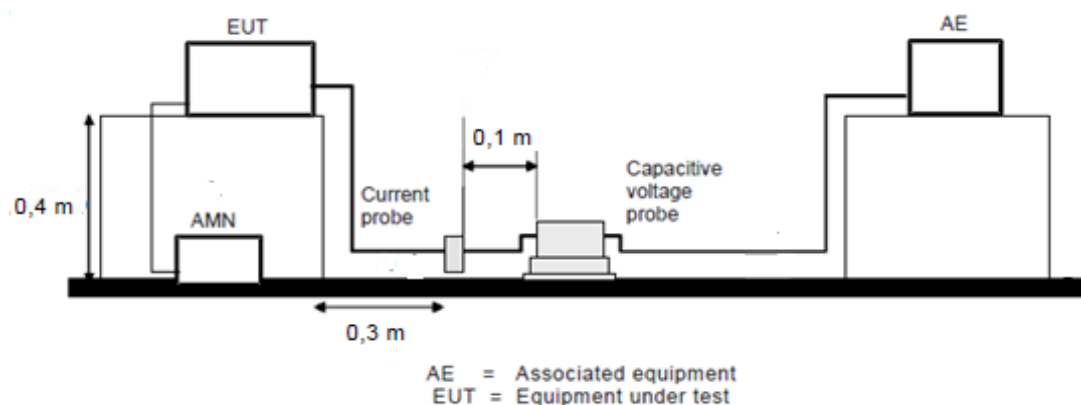


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.3 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT is set 10 meters away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1 m to 4 m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for quasi-peak detection (QP) at frequency up to 1 GHz.

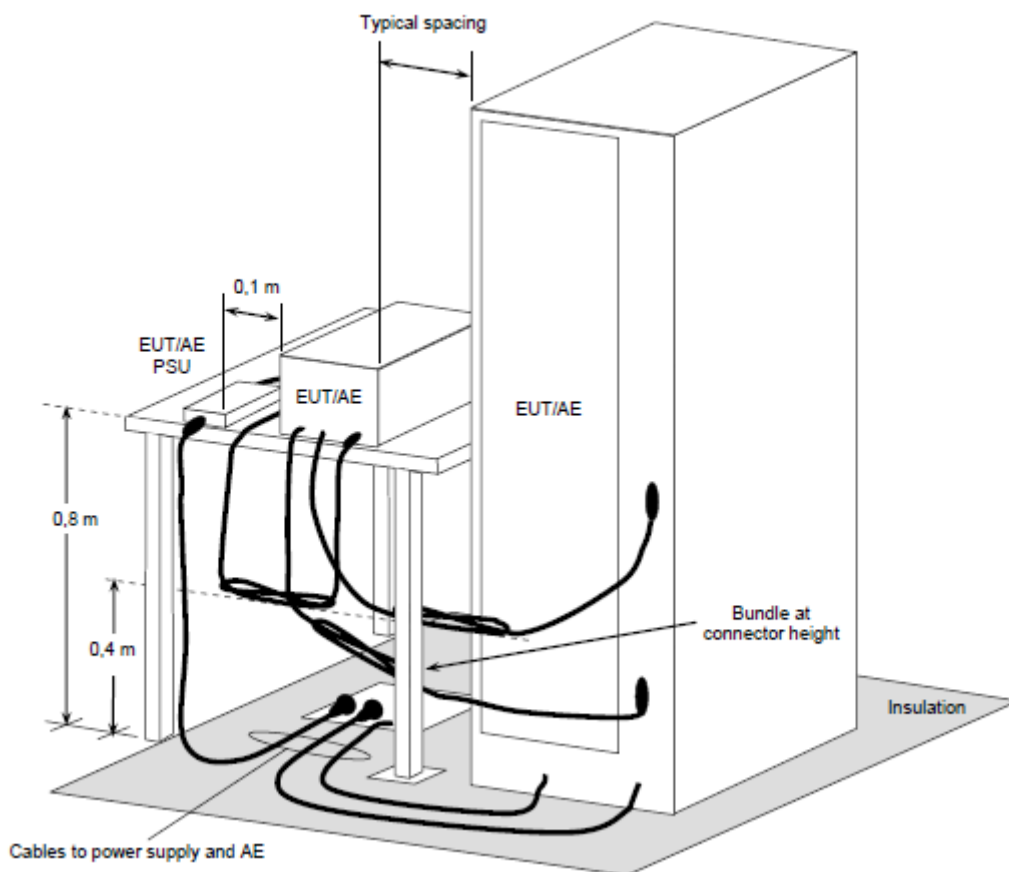

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

7 Test Results of Test Item

7.1 Conducted Emissions from Power Ports


Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	17°C, 75% RH
Tested by	Adam Chen		

Phase Of Power : Positive (+)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.28815	9.92	54.75	53.35	64.67	63.27	79.00	66.00	-14.33	-2.73
2	0.30644	9.93	54.75	38.78	64.68	48.71	79.00	66.00	-14.32	-17.29
3	0.68382	9.94	45.10	44.23	55.04	54.17	73.00	60.00	-17.96	-5.83
4	0.86681	9.95	49.17	44.31	59.12	54.26	73.00	60.00	-13.88	-5.74
5	0.92239	9.95	47.25	30.41	57.20	40.36	73.00	60.00	-15.80	-19.64
6	1.43086	9.97	41.54	32.60	51.51	42.57	73.00	60.00	-21.49	-17.43

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

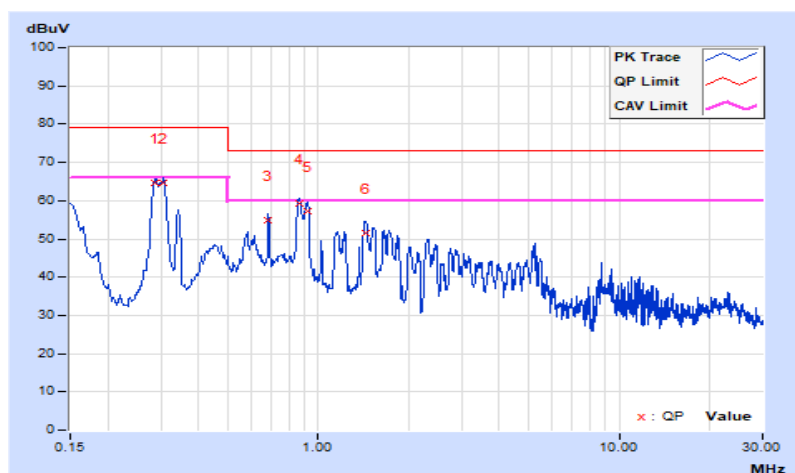


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	17°C, 75% RH
Tested by	Adam Chen		

Phase Of Power : Negative (-)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.28967	9.91	55.29	53.06	65.20	62.97	79.00	66.00	-13.80	-3.03
2	0.30454	9.92	54.63	40.78	64.55	50.70	79.00	66.00	-14.45	-15.30
3	0.68382	9.93	45.90	45.20	55.83	55.13	73.00	60.00	-17.17	-4.87
4	0.86120	9.94	49.32	43.80	59.26	53.74	73.00	60.00	-13.74	-6.26
5	0.91848	9.94	47.73	31.30	57.67	41.24	73.00	60.00	-15.33	-18.76
6	1.43864	9.96	41.00	34.17	50.96	44.13	73.00	60.00	-22.04	-15.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

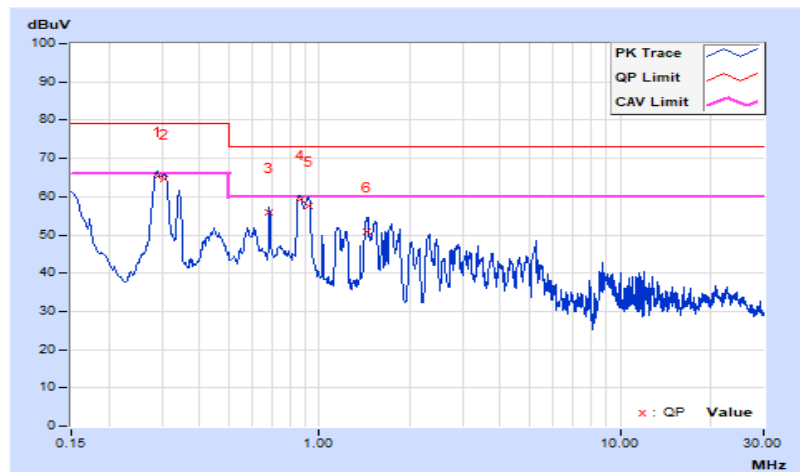

7.2 Conducted Emissions from Wired Network Ports


Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	17°C, 75% RH
Tested by	Adam Chen		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.68382	9.32	51.45	51.11	60.77	60.43	87.00	74.00	-26.23	-13.57
2	0.84026	9.29	46.86	41.91	56.15	51.20	87.00	74.00	-30.85	-22.80
3	16.22848	9.59	52.96	49.27	62.55	58.86	87.00	74.00	-24.45	-15.14
4	18.24265	9.69	53.78	50.38	63.47	60.07	87.00	74.00	-23.53	-13.93
5	19.70927	9.77	52.75	49.30	62.52	59.07	87.00	74.00	-24.48	-14.93
6	23.12749	9.97	55.15	51.92	65.12	61.89	87.00	74.00	-21.88	-12.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

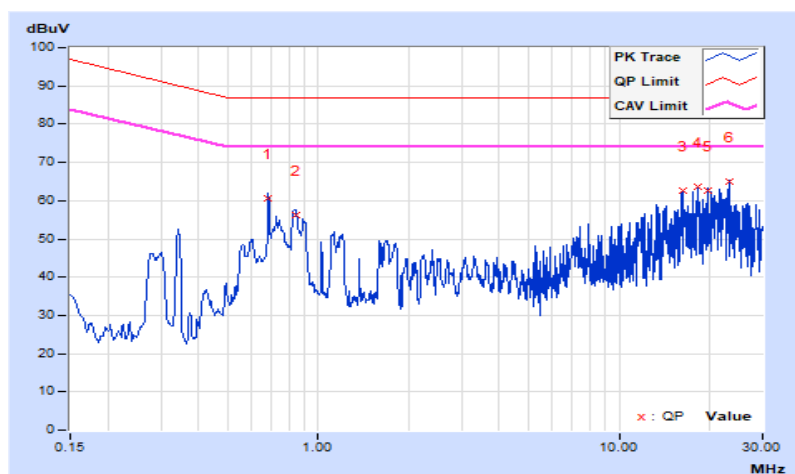


Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	24 Vdc	Environmental Conditions	17°C, 75% RH
Tested by	Adam Chen		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.28663	9.54	64.28	62.06	73.82	71.60	91.62	78.62	-17.80	-7.02
2	0.34290	9.49	63.65	63.14	73.14	72.63	90.13	77.13	-16.99	-4.50
3	0.68382	9.32	53.08	50.59	62.40	59.91	87.00	74.00	-24.60	-14.09
4	18.24265	9.69	53.59	50.04	63.28	59.73	87.00	74.00	-23.72	-14.27
5	19.70927	9.77	52.64	49.18	62.41	58.95	87.00	74.00	-24.59	-15.05
6	23.12749	9.97	52.79	48.92	62.76	58.89	87.00	74.00	-24.24	-15.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

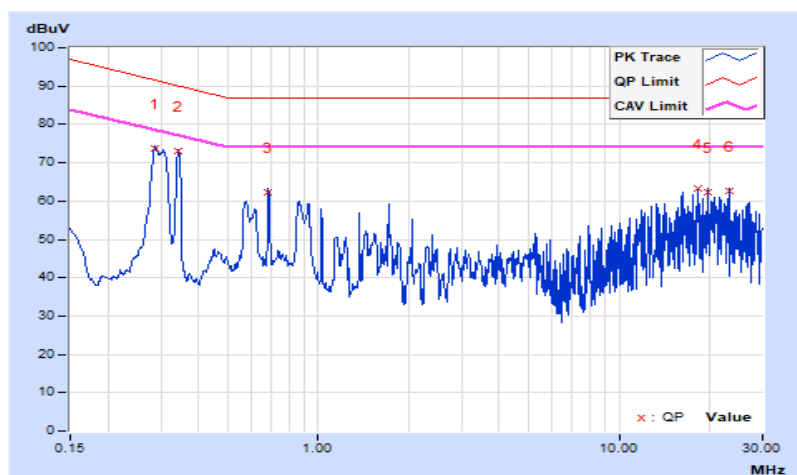

7.3 Radiated Emissions up to 1 GHz


Mode A

Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	24 Vdc	Environmental Conditions	26°C, 69% RH
Tested By	Abraham Sun		

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.00	34.33 QP	40.00	-5.67	3.74 H	150	52.85	-18.52
2	215.98	34.99 QP	40.00	-5.01	3.85 H	242	53.96	-18.97
3	250.00	40.04 QP	47.00	-6.96	3.69 H	101	57.14	-17.10
4	274.99	37.81 QP	47.00	-9.19	3.12 H	160	53.71	-15.90
5	337.52	34.33 QP	47.00	-12.67	3.82 H	99	48.65	-14.32
6	612.48	31.92 QP	47.00	-15.08	2.71 H	169	39.66	-7.74

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

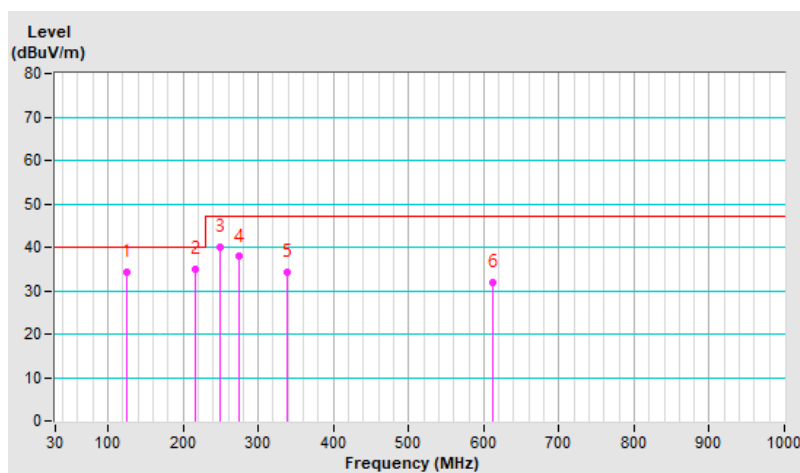


Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	24 Vdc	Environmental Conditions	26°C, 69% RH
Tested By	Abraham Sun		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.18	36.92 QP	40.00	-3.08	1.84 V	165	52.90	-15.98
2	101.84	34.45 QP	40.00	-5.55	1.67 V	345	54.93	-20.48
3	125.00	37.63 QP	40.00	-2.37	1.93 V	353	55.37	-17.74
4	250.00	37.42 QP	47.00	-9.58	1.42 V	121	53.95	-16.53
5	324.98	31.46 QP	47.00	-15.54	1.59 V	240	45.49	-14.03
6	488.03	31.23 QP	47.00	-15.77	1.21 V	25	41.34	-10.11

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

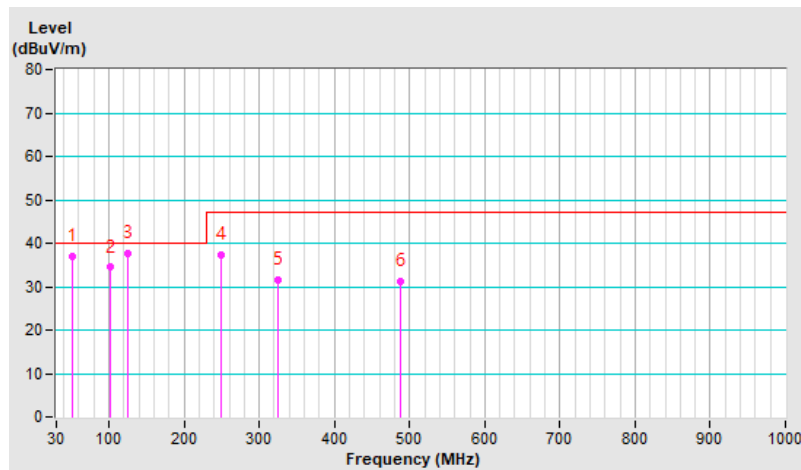

8 Pictures of Test Arrangements



8.1 Conducted Emissions from Power Ports

Mode A

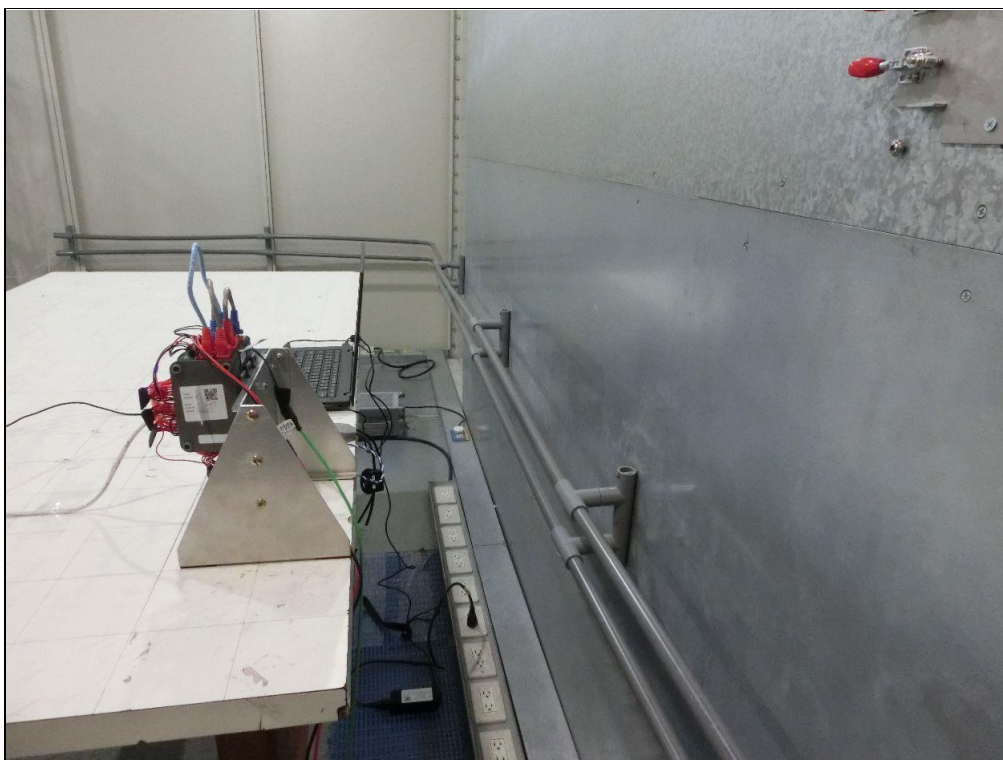

8.2 Conducted Emissions from Wired Network Ports

Mode A

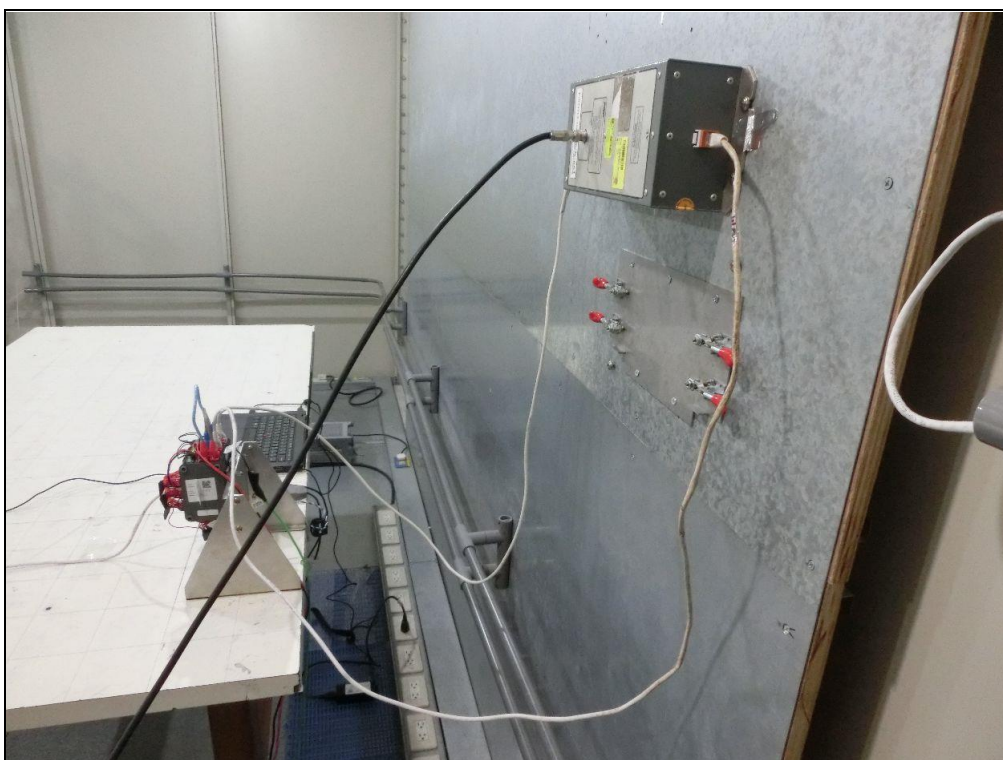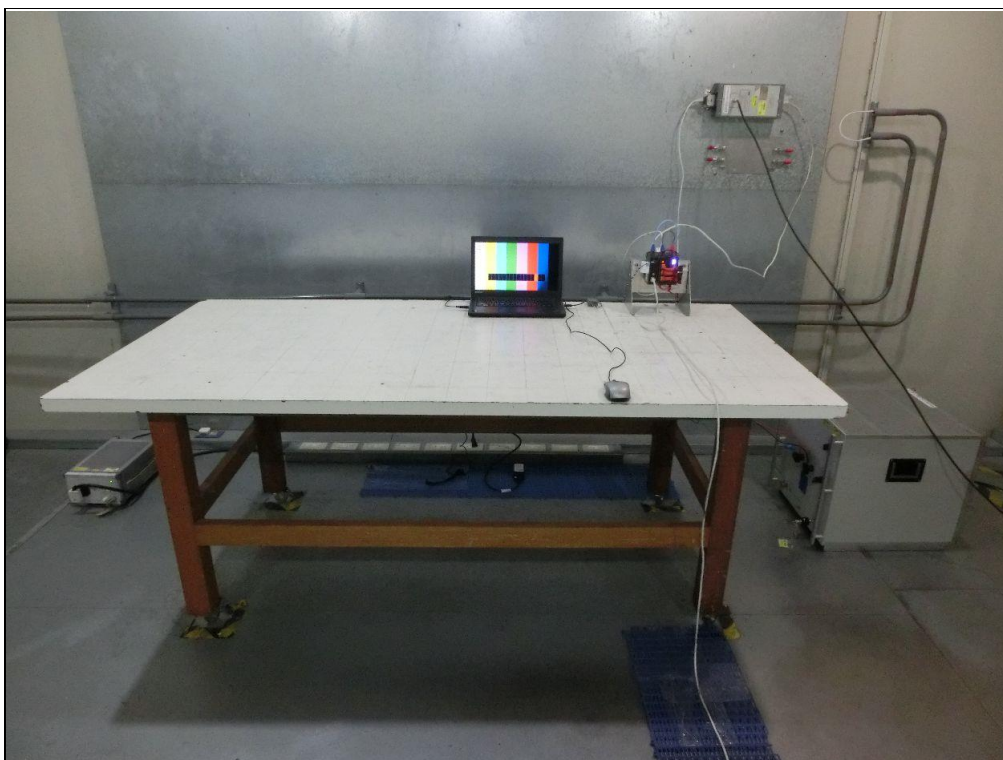


Mode B



8.3 Radiated Emissions up to 1 GHz

Mode A

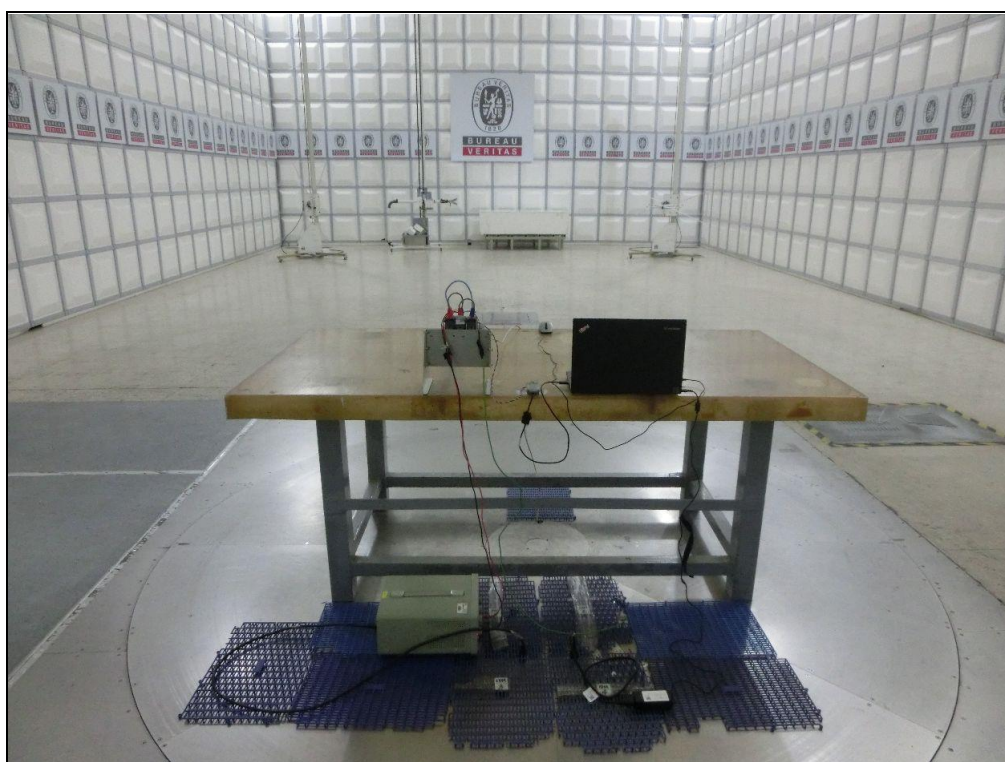

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---